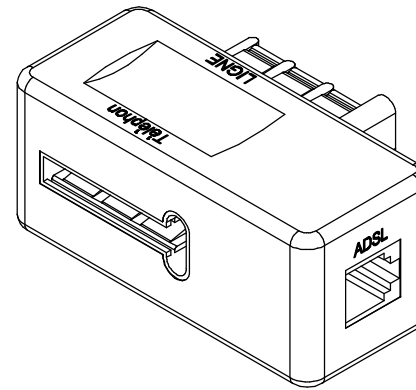
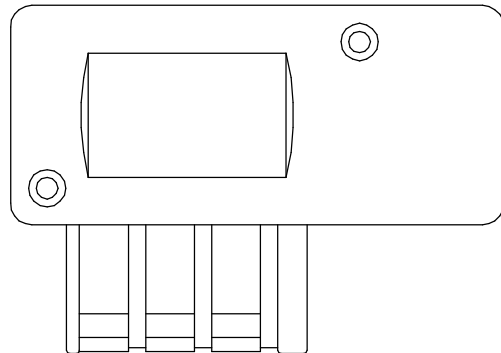
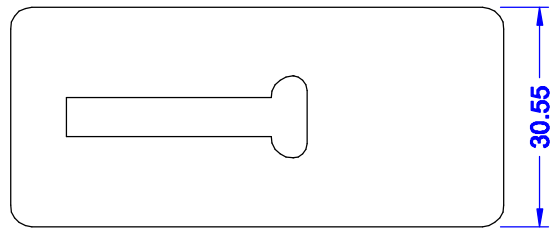
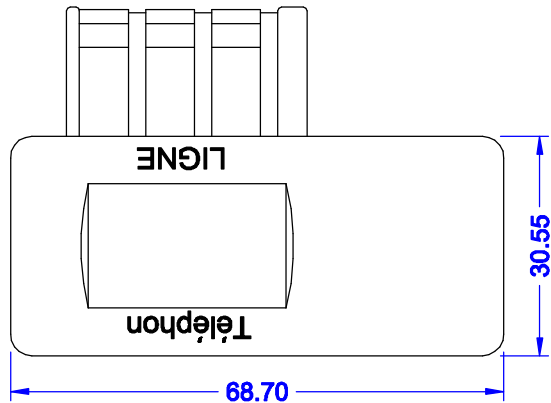


ELECTRICAL CHARACTERISTICS :

1. LINE IMPEDANCE : 600 OHM
2. DCR EACH LINE : 50 OHM MAX.
3. INSERTION LOSS (@1KHZ) : 1dB MAX.
4. INSERTION LOSS DISTORTION (@200HZ~4KHZ) : ± 1 dB
5. RETURN LOSS (@300HZ~500HZ) : 25dB MIN.
 (@500HZ~2KHZ) : 25dB MIN.
 (@2KHZ~3.4KHZ) : 24dB MIN.
6. DELAY DISTORTION (@200HZ~4KHZ) : 200uSEC MAX.
7. ATTENUATION (@32KHZ~60KHZ) : 15dB MIN.
 (@60KHZ~1.1MHZ) : 25dB MIN.
8. ISOLATION RESISTANCE : 25M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL: 022794-8887 FAX: 022794-8804		TITLE SPLITTER	
								DWG. NO. ATF049B	
A	TXT	03/11 /2004	BART	SIMON	SUEDY	UNITS: M/M		SAFETY	SHEET 10F 1
	RELEASE	12/18 /2003	BART	SIMON	SUEDY	DATE 12/18/03			DRAW Pair
NO:	DESCRIPTION	DATE	BY	CHK	APPD				
REVISIONS									