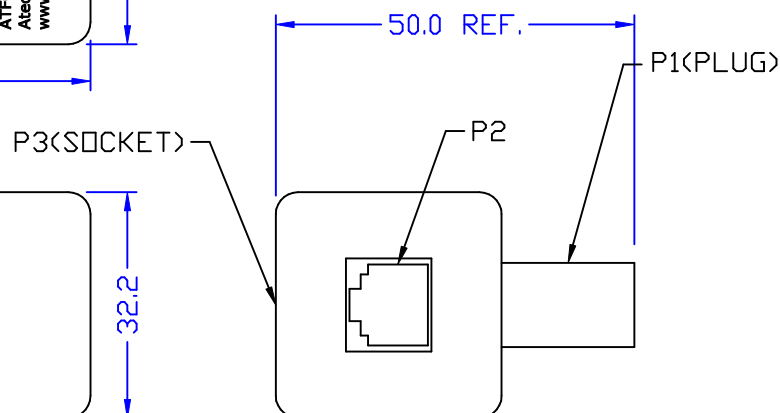
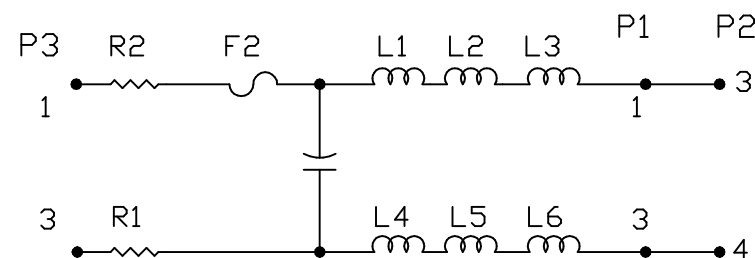
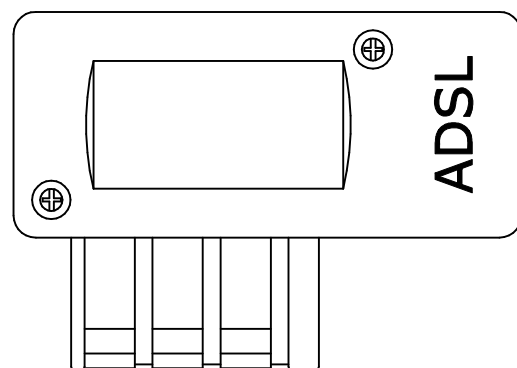
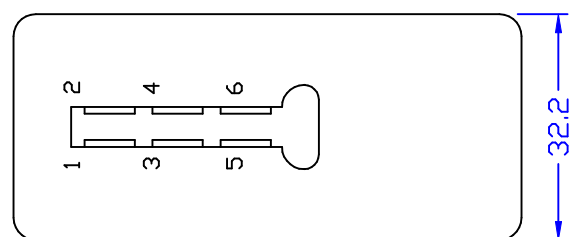


ELECTRICAL CHARACTERISTICS :

1. LINE IMPEDANCE : 600 OHM
2. DCR EACH LINE : 50 OHM MAX.
3. INSERTION LOSS (@1KHZ) : 1dB MAX.
4. INSERTION LOSS DISTORTION (@200HZ~4KHZ) : ± 1 dB
5. RETURN LOSS (@300HZ~500HZ) : 14dB MIN.
(@500HZ~2KHZ) : 18dB MIN.
(@2KHZ~3.4KHZ) : 14dB MIN.
6. DELAY DISTORTION (@200HZ~4KHZ) : 200uSEC MAX.
7. ATTENUATION (@32KHZ~60KHZ) : 35dB MIN.
(@60KHZ~1.1MHZ) : 45dB MIN.
8. ISOLATION RESISTANCE : 20M OHM MIN.
9. RoHS COMPLIANCE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.5

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE SPLITTER	
A	ADD CKT	04/14/2005	PAIR	EUGENE	SUEYD		DWG. NO. ATF049R	
	RELEASE	04/07/2005	BART	AL	SUEYD	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 04/07/05		DRAW Pair
REVISIONS								