
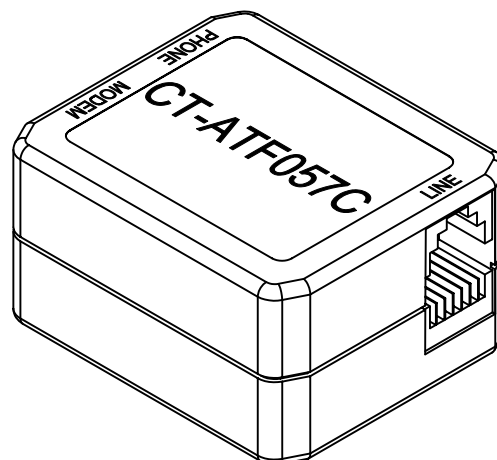

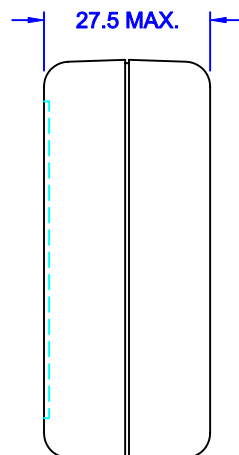


ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. POTS : (600 OHMS OR 12.5 OHMS + (750 OHMS//150nF))
INSERTION LOSS :
(@ 200 HZ) = 1 dB MAX.
(@ 1 KHZ) = 1 dB MAX.
(@ 3.6 KHZ) = 1 dB MAX.
RETURN LOSS :
(@ 300 HZ) = 14 dB MIN.
(@ 2 KHZ) = 14 dB MIN.
(@ 3.4KHZ) = 11dB MIN.
3. ISDN : (135/150 OHM)
INSERTION LOSS :
(@ 1 KHZ) = 0.8 dB MAX.
(@ 40 KHZ) = 0.8 dB MAX.
(@ 80 KHZ) = 2 dB MAX.
RETURN LOSS :
(@ 4 KHZ) = 16 dB MIN.
(@ 40 KHZ) = 16 dB MIN.
(@ 80 KHZ) = 14 dB MIN.
4. ATTENLATION
(@ 150 KHZ) = 65 dB MIN.
(@ 1.1 MHZ) = 65 dB MIN.

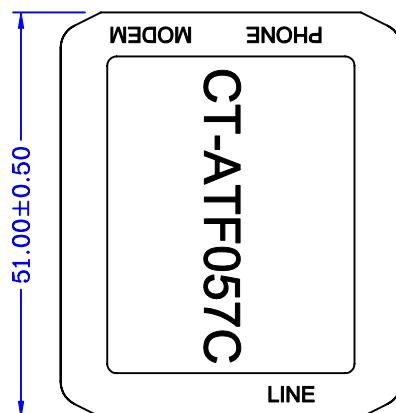

					Atech® Atech Technology Co., Ltd. TEL: (02) 2794-8887 FAX: (02) 2794-8004	TITLE ADSSL POTS/ISDN SPLITTER		
B	ISDN = 150 OHM	04/07/2005	PAIR	AL		SUEDY	DWG. NO.	
A	SPEC.	04/26/2004	PAIR	EUGENE		SUEDY	ATF057C	
	RELEASE	11/27/2003	BART	SIMON		SUEDY	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						11/27/03		Pair