



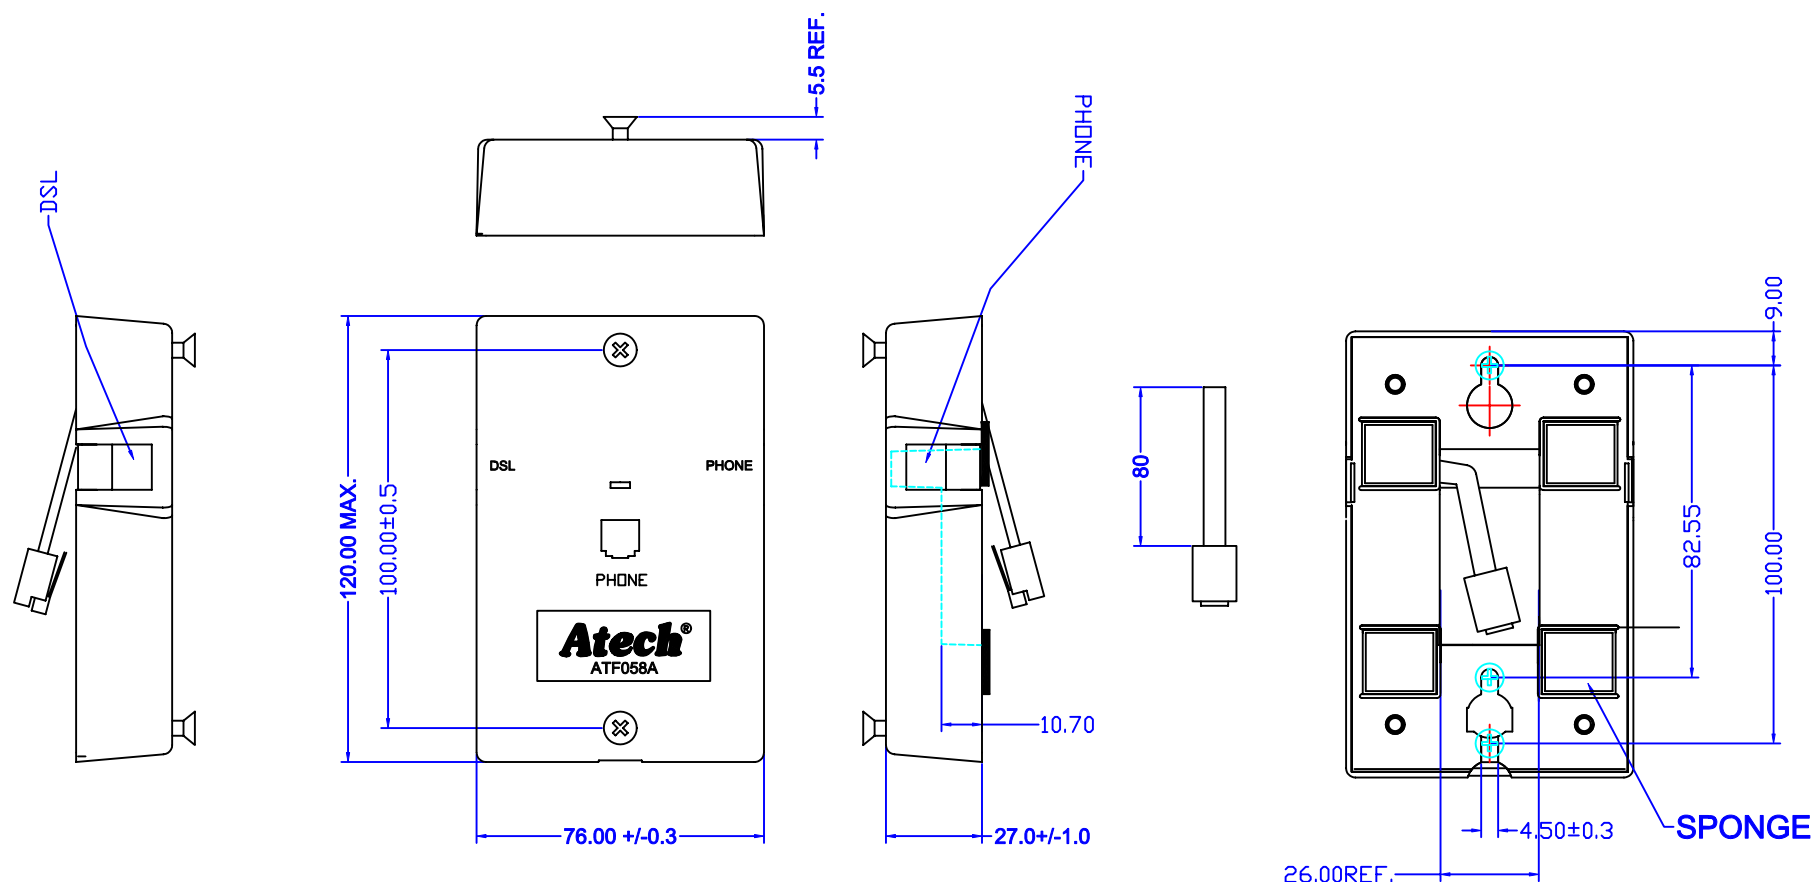

ELECTRICAL CHARACTERISTICS :

1. DCR : EACH LINE = 12.5 OHM MAX.
2. INSERTION LOSS : (@1KHz) = ±0.5dB
3. INSERTION LOSS DISTORTION :
 (@200Hz TO 3.4KHz) = -1 dB TO 0.5 dB
 (@3.4KHz TO 4KHz) = -1.5 dB TO 1 dB
4. RETURN LOSS : (@300Hz) = 13dB MIN.
 (@1KHz) = 9dB MIN.
 (@3.4KHz) = 3dB MIN.
5. ATTENUATION : (@30KHz) = 21dB MIN.
 (@500KHz) = 25dB MIN.
 (@1.1MHz) = 25dB MIN.
6. HI-POT : (@250VDC, 1mA, 2SEC) T-R

None tolerance for reference

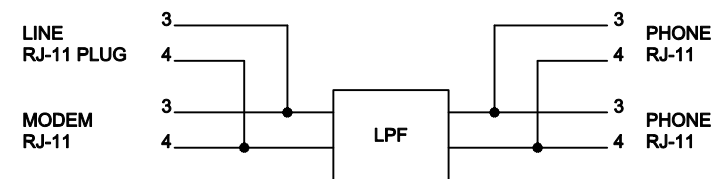

F	DIM. & SPEC.	12/10/2004	BART	MICHAEL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	ADSL POTS SPLITTER
E	ADD HOOK	12/10/2004	PAIR	AL	SUEDY		DWG. NO.	ATF058A
D	CHANGE TOLERANCE 76+/-0.3 25.4+/-0.3	11/29/2004	PAIR	AL	SUEDY			
	RELEASE	06/06/2003	RORY	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW Pair
REVISIONS						06/06/03		