



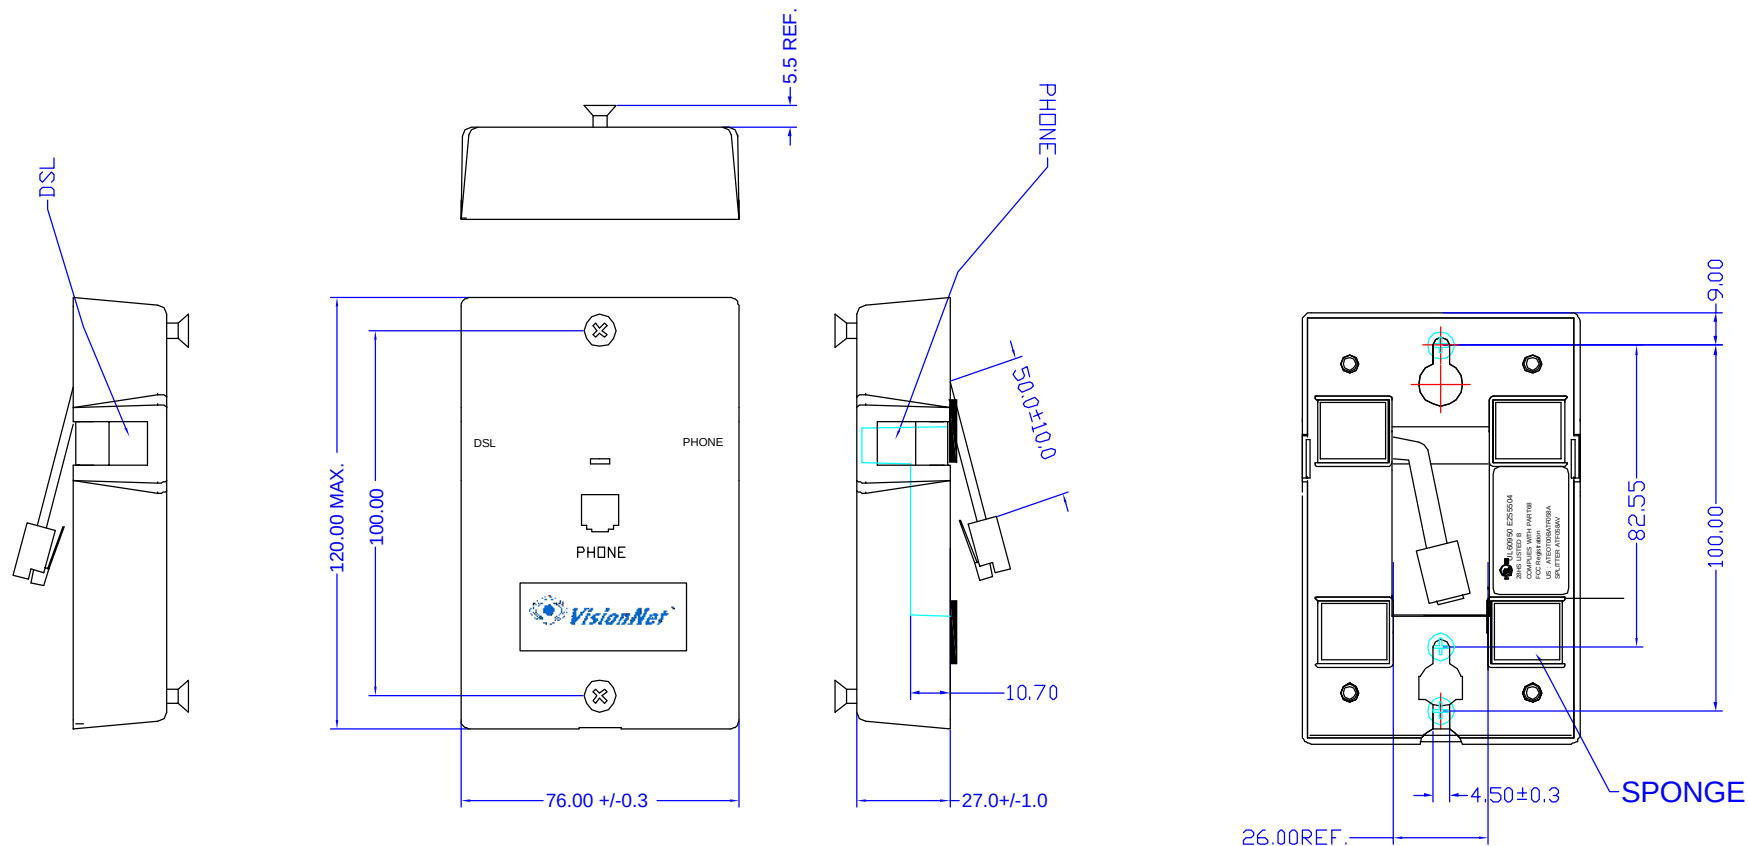

ELECTRICAL CHARACTERISTICS :

1. DCR : EACH LINE = 12.5 OHM MAX.
2. INSERTION LOSS : (@1KHz) = ± 0.5 dB
3. INSERTION LOSS DISTORTION :
 (@200Hz TO 3.4KHz) = -1 dB TO 0.5 dB
 (@3.4KHz TO 4KHz) = -1.5 dB TO 1 dB
4. RETURN LOSS : (@300Hz) = 13dB MIN.
 (@1KHz) = 9dB MIN.
 (@3.4KHz) = 3dB MIN.
5. ATTENUATION : (@30KHz) = 21dB MIN.
 (@500KHz) = 25dB MIN.
 (@1.1MHz) = 25dB MIN.
6. HI-POT : (@250VDC, 1mA, 2SEC) T-R

None tolerance for reference

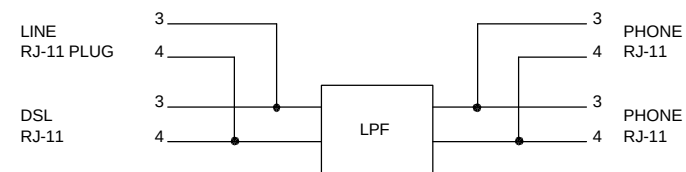

G	ADD LB3521-01	07/26/2005	BART	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004	TITLE	ADSL POTS SPLITTER
F	DIM	07/15/2005	BART	AL	SUEDY		DWG. NO.	ATF058AV
E	DIM SPEC.	03/31/2005	BART	MICHAEL	SUEDY			
	RELEASE	11/10/2004	PAIR	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE	11/10/04	Pair