
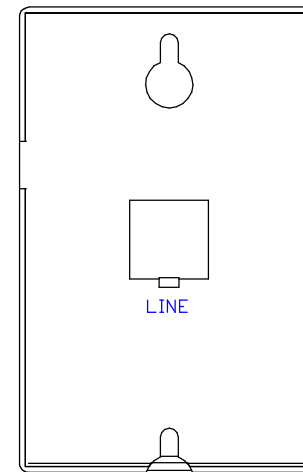

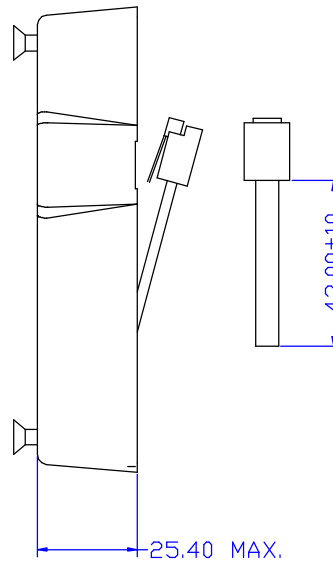
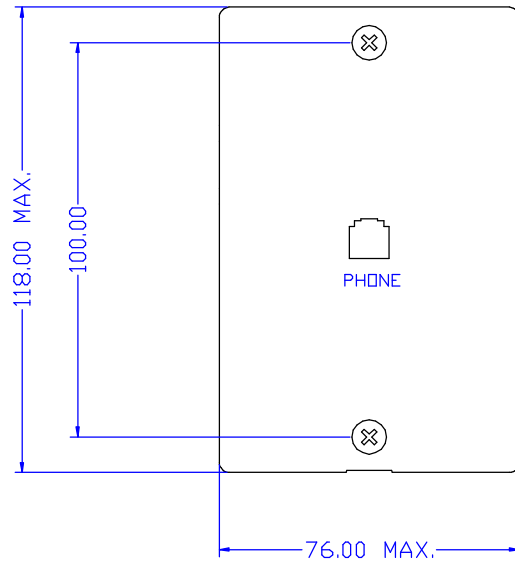




ELECTRICAL CHARACTERISTICS : MEET ITU-T G.992.1

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS (@1KHZ) : 1.0dB MAX.
3. INSERTION LOSS DISTORTION (@200HZ-4KHZ) : ± 1.5 dB
4. RETURN LOSS (REF 600 OHM) : @300HZ-3.4KHZ = 6dB MIN.
5. ATTENUATION (@32KHZ-1.1MHZ) : 50dB MIN.
6. HI-POT (@1500VAC, 1mA, 1MIN) : EACH PHONE JACK TO CASE

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE ADSL POTS FILTER	
								DWG. NO. ATF058B	
	RELEASE	07/28/2003	RDY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						07/28/03		DRAW <i>Pair</i>	