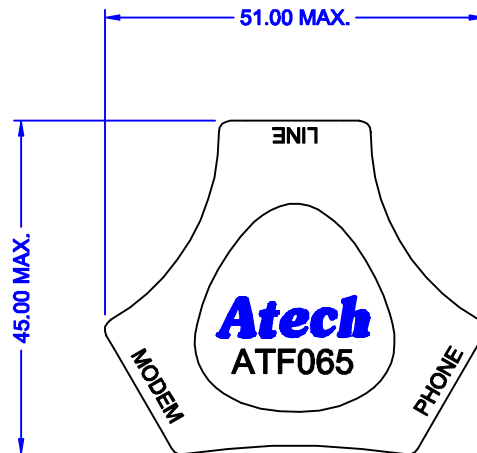
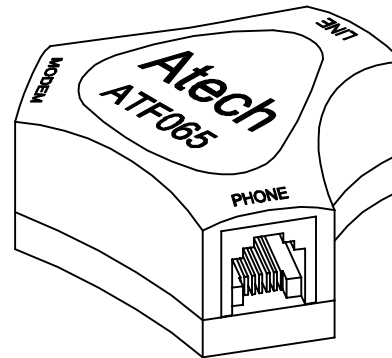
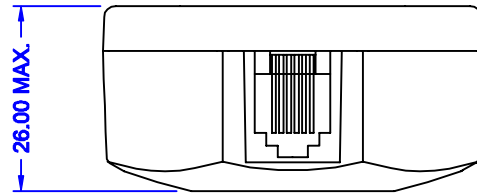


ELECTRICAL CHARACTERISTICS :

1. DCR : EACH LINE = 10 OHM MAX.
2. INSERTION LOSS : @ 1KHZ = 0.5dB MAX.
3. INSERTION LOSS DISTORTION :
 - 200HZ = -1 TO 0.5 dB.
 - 3.4KHZ = -1.5 TO 1dB.
 - 4KHZ = -1.5 TO 1dB.
4. RETURN LOSS :
 - 260HZ = 12 dB MIN.
 - 500HZ = 12 dB MIN.
 - 2KHZ = 10 db MIN.
 - 3.4KHZ = 5 dB MIN.
5. ADSL FREQ. REJECTION :
 - 25KHZ = 21 dB MIN.
 - 1.1MHZ = 21 dB MIN.
 - 3MHZ = 21 dBMIN.

					Atech® Atech Technology Co., Ltd. TEL: (02) 2784-8887 FAX: (02) 2784-8804	TITLE SPLITTER		
						DWG. NO. ATF065		
A	SPEC.	02/06 /2004	BART	SIMON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	12/25 /2003	BART	SIMON	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD			
REVISIONS								
12/25/03							DRAW Pair	