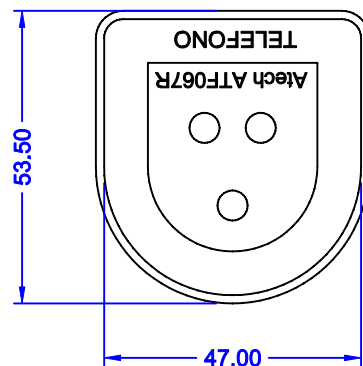
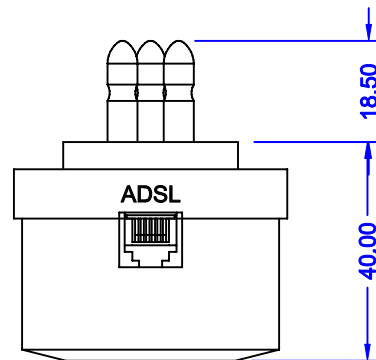
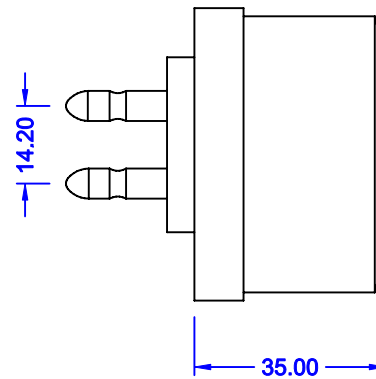
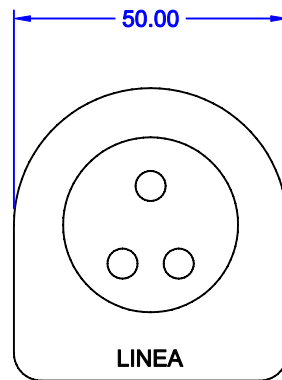


ELECTRICAL CHARACTERISTICS :

(POTS PORT IMPEDANCE : 270 OHM + 150nF // 750 OHM)

1. DCR : EACH LINE = 25 OHM MAX.
2. INSERTION LOSS : (@1KHz) = 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200Hz - 4KHz) = ± 1.1 dB
4. RETURN LOSS : (@300Hz - 500Hz) = 14dB MIN.
(@500Hz - 2KHz) = 18dB MIN.
(@2KHz - 3.4Hz) = 14dB MIN.
5. LONGITUDINAL BALANCE : (@200Hz - 3KHz) = 53dB MIN.
6. ATTENUATION : (@32KHz - 60KHz) = 15dB MIN.
(@60KHz - 200KHz) = 25dB MIN.
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-8887 FAX: (02)2794-8004	TITLE ITALY ADSL POTS SPLITTER	
							DWG. NO. ATF067R	
	RELEASE	07/13/2006	PAIR	MIC	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						07/13/06		