
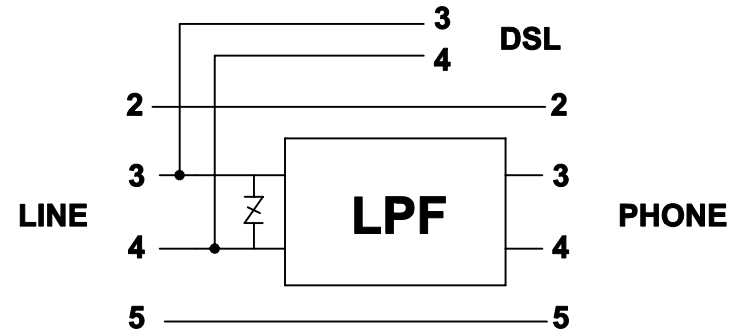
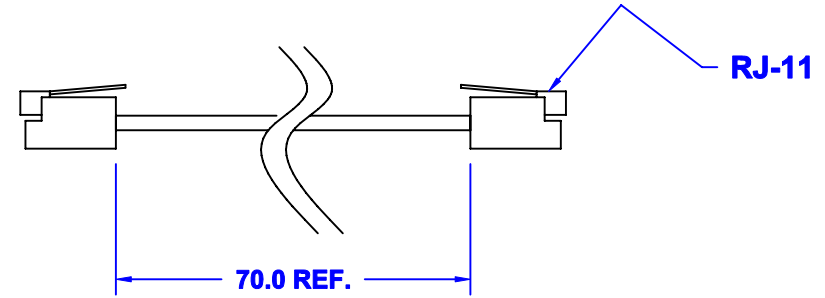
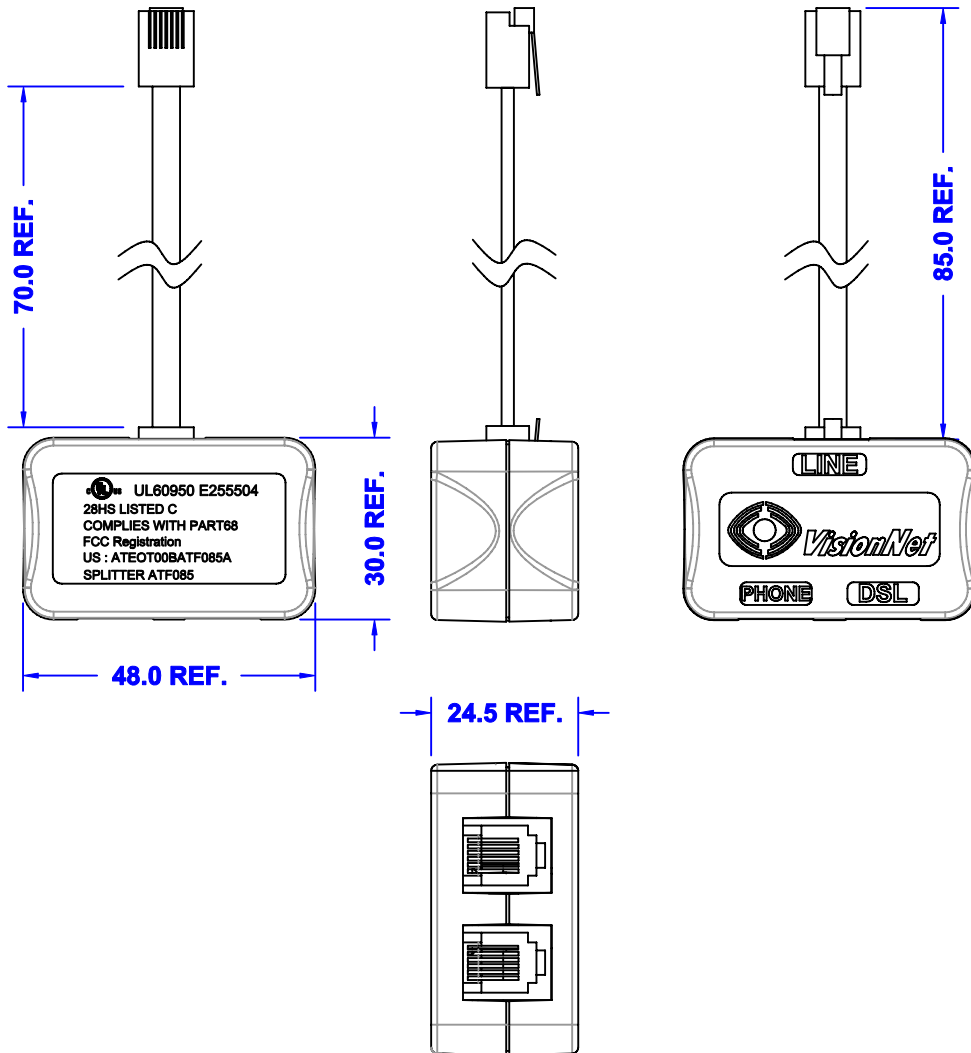




ELECTRICAL CHARACTERISTICS : (MEETS/EXCEEDS T1E1.4 STANDARD)

1. EACH LINE : 10 OHM MAX.
2. OFF HOOK INSERTION LOSS (@1KHZ) : SINGLE FILTER : 0.5dB MAX.
WITH 5 FILTERS : 1dB MAX.
3. OFF HOOK INSERTION LOSS DISTORTION
(@200HZ~3.4KHZ) : SINGLE FILTER : 0.5dB~-1dB
WITH 5 FILTERS : 2.5dB~-1.5dB
(@3.4KHZ~4KHZ) : SINGLE FILTER : 1dB~-1.5dB
WITH 5 FILTERS : 4dB~-2dB
4. RETURN LOSS : PHONE PORT (@SRLL) = 13dB MIN.
(@ERL) = 9dB MIN.
(@SRLH) = 3dB MIN.
LINE PORT (@SRLL) = 12dB MIN.
(@ERL) = 10dB MIN.
(@SRLH) = 5dB MIN.
5. LONGITUDINAL BALANCE (@200HZ~1KHZ) : 50dB MIN.
(@1KHZ~3KHZ) : 50dB MIN.
6. ADSL FREQUENCY REJECTION (@25KHZ~12MHZ) : 21dB MIN.

d	Add gastube and change to 4 wire	12/22/2005	PAIR	EUGENE	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	ADSL SPLITTER
C	ADD UL NO.	08/30/2005	BART	AL	SUEDY		DWG. NO.	ATF085
B	ERASE MARKING	03/30/2005	BART	AL	SUEDY			
	RELEASE	01/05/2005	PAIR	EUGENE	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE 01/05/05	P/N: CSA060002A	DRAW Pair