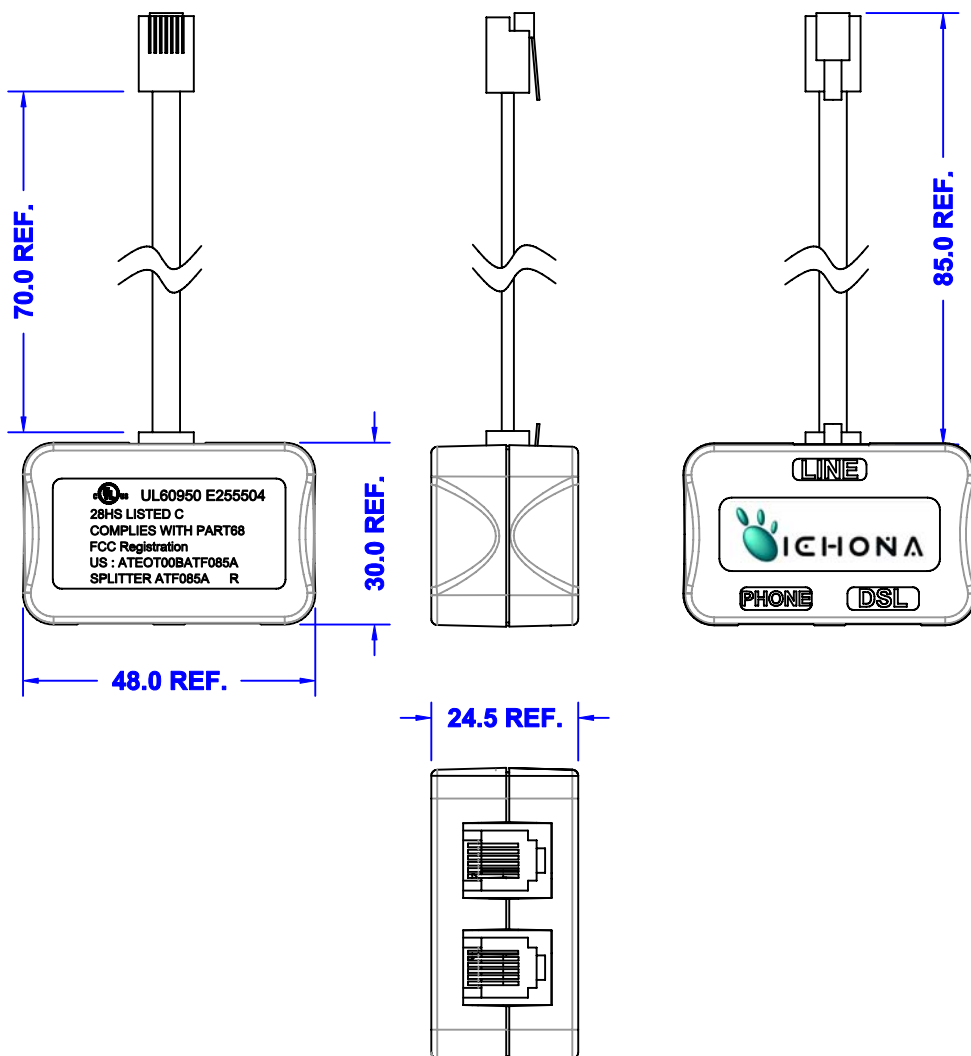


ELECTRICAL CHARACTERISTICS : (MEETS/EXCEEDS T1E1.4 STANDARD)

1. EACH LINE : 10 OHM MAX.
2. OFF HOOK INSERTION LOSS (@1KHZ) : SINGLE FILTER : 0.5dB MAX.
WITH 5 FILTERS : 1dB MAX.
3. OFF HOOK INSERTION LOSS DISTORTION
(@200HZ~3.4KHZ) : SINGLE FILTER : 0.5dB~1dB
WITH 5 FILTERS : 2.5dB~1.5dB
(@3.4KHZ~4KHZ) : SINGLE FILTER : 1dB~1.5dB
WITH 5 FILTERS : 4dB~2dB
4. RETURN LOSS : PHONE PORT (@SRLL) = 13dB MIN.
(@ERL) = 9dB MIN.
(@SRLH) = 3dB MIN.
LINE PORT (@SRLL) = 12dB MIN.
(@ERL) = 10dB MIN.
(@SRLH) = 5dB MIN.
5. LONGITUDINAL BALANCE (@200HZ~1KHZ) : 50dB MIN.
(@1KHZ~3KHZ) : 50dB MIN.
6. ADSL FREQUENCY REJECTION (@25KHZ~12MHZ) : 21dB MIN.
7. RoHS Compliant
8. BLISTER PACKING

					Atech®		TITLE	ADSL
					Atech Technology Co., Ltd.			SPLITTER
					TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.	ATF085AIR
RELEASE		04/12/2007	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY	
						M/M		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	PIN:	SHEET 1 OF 1
REVISIONS						04/12/07	CSA060010A	DRAW Pair