
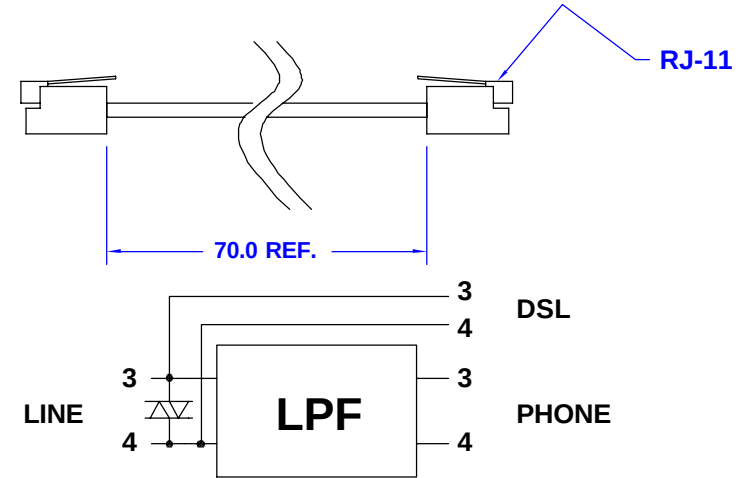
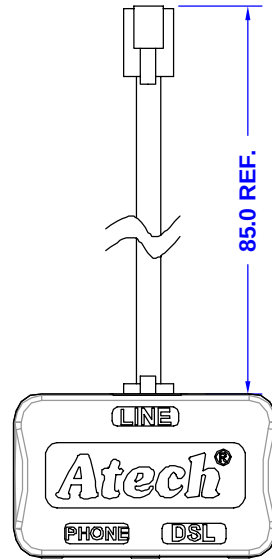
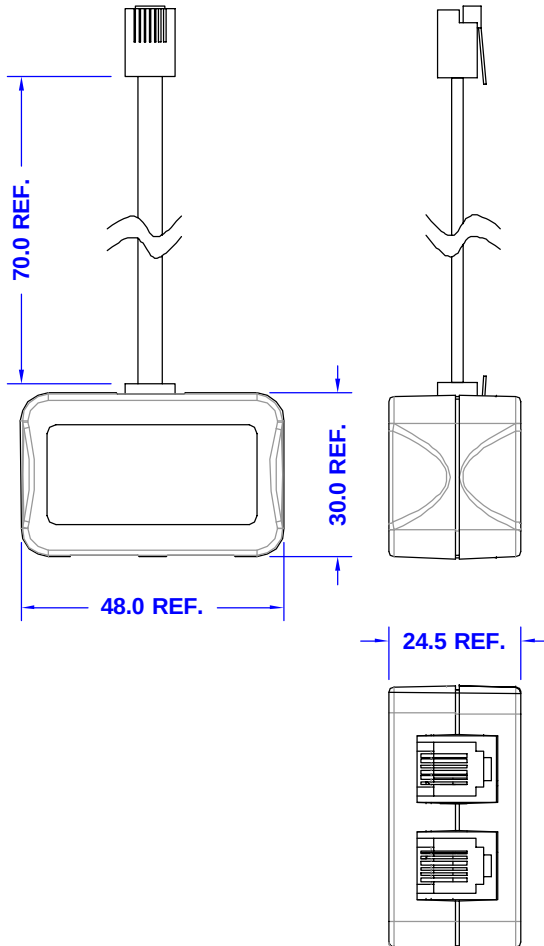




ELECTRICAL CHARACTERISTICS : (MEETS/EXCEEDS T1E1.4 STANDARD)

1. EACH LINE : 10 OHM MAX.
2. OFF HOOK INSERTION LOSS (@1KHZ) : SINGLE FILTER : 0.5dB MAX.
WITH 5 FILTERS : 1dB MAX.
3. OFF HOOK INSERTION LOSS DISTORTION
(@200HZ~3.4KHZ) : SINGLE FILTER : 0.5dB~1dB
WITH 5 FILTERS : 2.5dB~1.5dB
(@3.4KHZ~4KHZ) : SINGLE FILTER : 1dB~1.5dB
WITH 5 FILTERS : 4dB~2dB
4. RETURN LOSS : PHONE PORT (@SRL) = 13dB MIN.
(@ERL) = 9dB MIN.
(@SRLH) = 3dB MIN.
LINE PORT (@SRL) = 12dB MIN.
(@ERL) = 10dB MIN.
(@SRLH) = 5dB MIN.
5. LONGITUDINAL BALANCE (@200HZ~1KHZ) : 50dB MIN.
(@1KHZ~3KHZ) : 50dB MIN.
6. ADSL FREQUENCY REJECTION (@25KHZ~12MHZ) : 21dB MIN.

						Atech®		TITLE	ADSL SPLITTER
						Atech Technology Co., Ltd.		DWG. NO.	ATF085AS
						TEL: (02) 2794-8887 FAX: (02) 2794-8004			
RELEASE		08/19/2005	BART	MICHAEL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO: DESCRIPTION		DATE	BY	CHK	APPD	M/M			
						DATE			DRAW
						08/19/05			Pair