
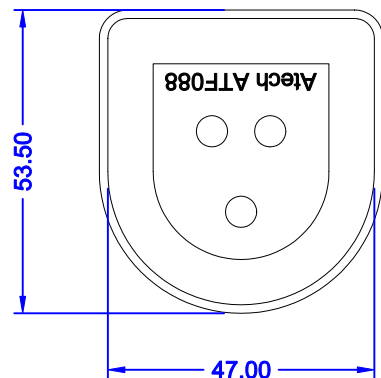
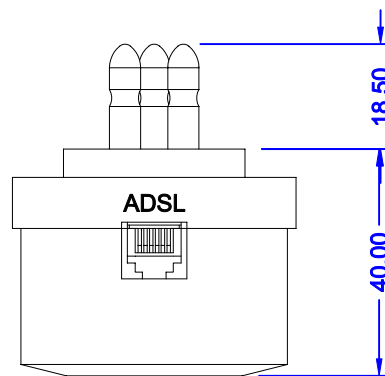
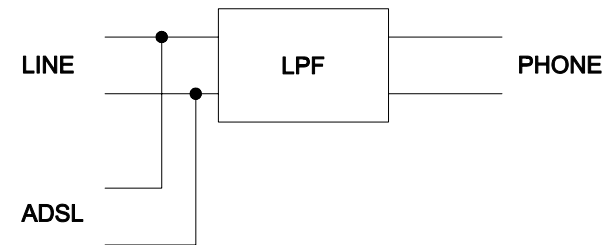
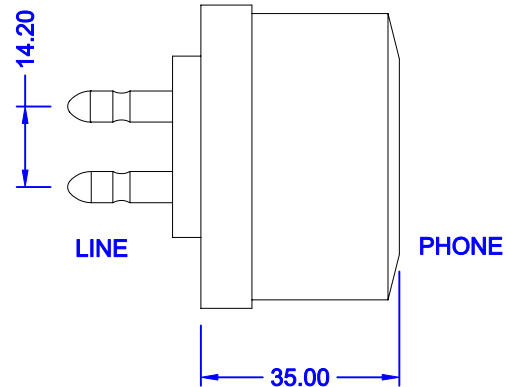


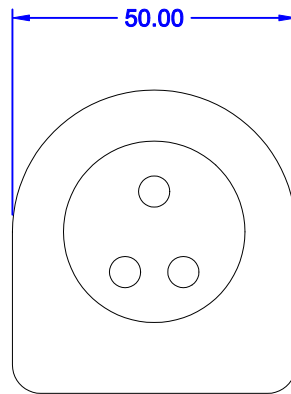

ELECTRICAL CHARACTERISTICS :

(POTS PORT IMPEDANCE : 600 OHM)

1. DCR : EACH LINE = 25 OHM MAX.
2. INSERTION LOSS : (@1KHz) = 1 dB MAX.
3. INSERTION LOSS DISTORTION : (@300 Hz-4KHz) = ± 1.0 dB.
4. RETURN LOSS : (@300Hz-3.4 KHz) = 14 dB MIN.
(@3.4KHz-4KHz) = 12 dB MIN.
5. LONGITUDINAL BALANCE (@600 OHM) :
 50Hz~600Hz = 40 dB MIN.
 600Hz~3.4KHz = 46 dB MIN.
 3.4KHz~4KHz = 40 dB MIN.
 4KHz~1.1MHz = 40 dB MIN.
6. ATTENUATION : (@32KHz~500KHz) = 23 dB MIN.
(@500KHz~1.1MHz) = 55 dB MIN.
7. DC RESISTANCE TO EARTH = 20 MOHM MIN.
8. DC RESISTANCE BETWEEN EACH LINE = 5 MOHM MIN.

						Atech® Atech Technology Co., Ltd. TEL: (02) 794-8867 FAX: (02) 794-8004		TITLE FINLADN ADSL SPLITTER	
								DWG. NO. ATF088	
	RELEASE	03/24/2005	BART	EUGENE	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair	
REVISIONS						03/24/05			