
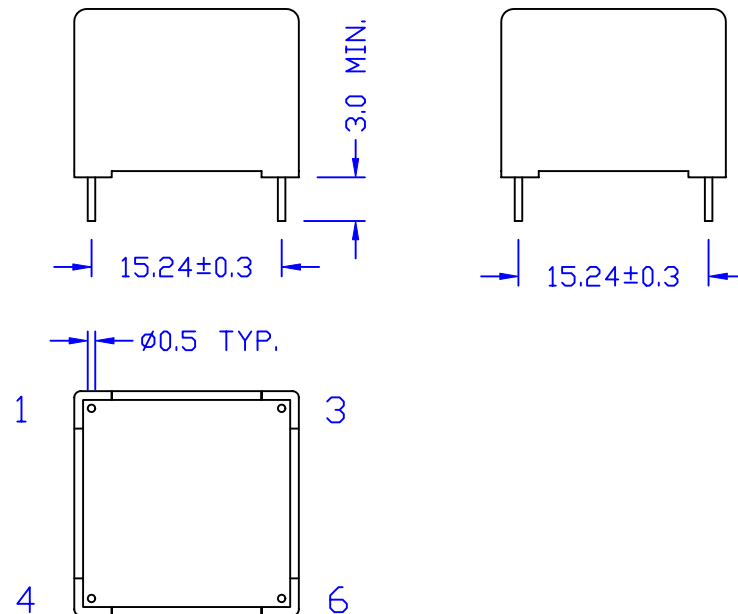
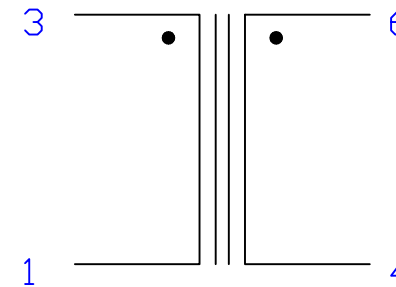


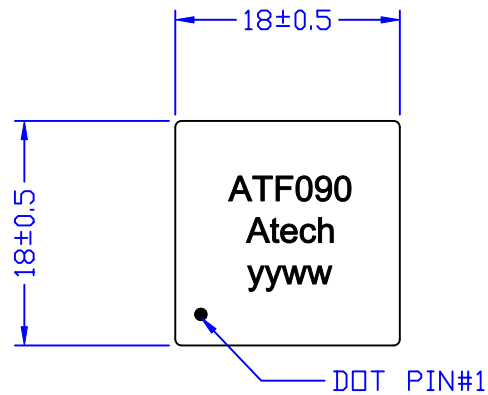

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) : 35Ω MAX.
- INSERTION LOSS (REF. 600Ω) :
1KHz = 1 dB MAX.
- INSERTION LOSS DISTORTION (REF. 600Ω) :
200Hz = $\pm 1.5 \text{ dB}$,
3.4KHz = $\pm 1.5 \text{ dB}$,
4KHz = $\pm 2 \text{ dB}$.
- RETURN LOSS (REF. 600Ω) :
1KHz = 6 dB MIN.
300Hz = 5 dB MIN.
3KHz = 3 dB MIN.
- LONGITUDINAL BAL. :
200Hz = 58 dB MIN.
1KHz = 58 dB MIN.
3KHz = 53 dB MIN.
- ATTENUATION :
25 KHz = 25 dB MIN.
30KHz = 30 dB MIN.

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE MICRO FILTER FOR ADSL	
							DWG. NO. ATF090	
	RELEASE	04/13 /2005	BART	EEFLYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/13/05		