

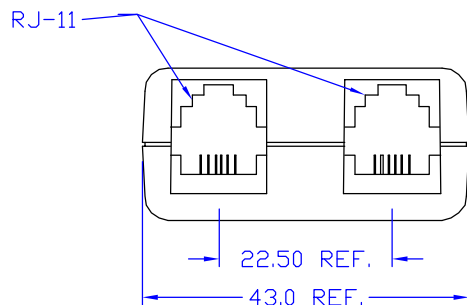


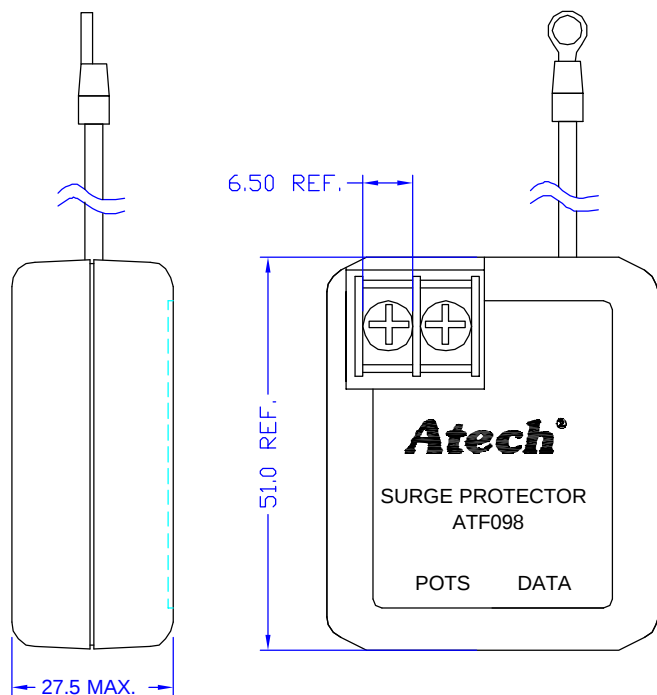

CONFIGURE SCHEMATIC

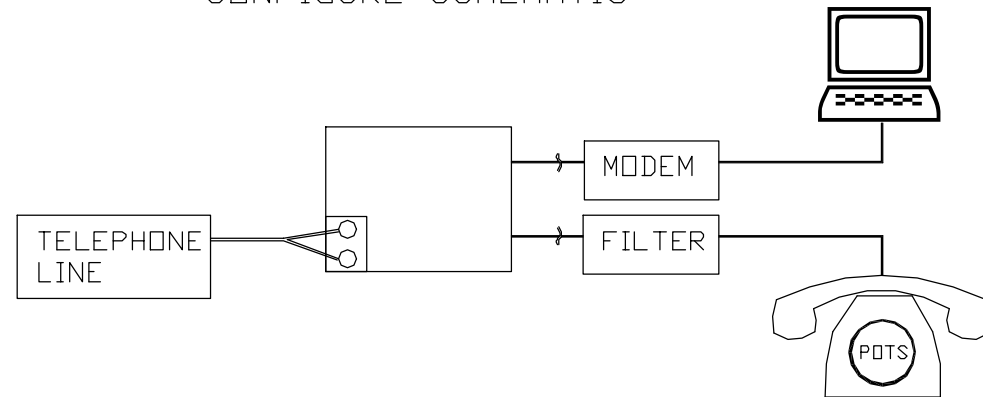

ELECTRICAL CHARACTERISTICS :

(TEST ACCORDING TO ITU-T REV. K.12)

1. DC SPARK-OVER VOLTAGE : 230 V $\pm$ 20%.
2. IMPULSE DISCHARGE CURRENT (8/20 μ S) : 10KA
3. INSULATION RESISTANCE >10 G Ω
4. DCR TIP TO RING < 10 Ω
5. OPERATION AND STORAGE TEMPERATURE -40 TO +90 $^{\circ}$ C
6. WEIGHT 40g

						Atech® Atech Technology Co., Ltd. TEL: (02) 2704-9887 FAX: (02) 2704-9004	TITLE SURGE PROTECTOR	
							DWG. NO.	ATF98
	RELEASE	08/30/2009	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						08/30/05		