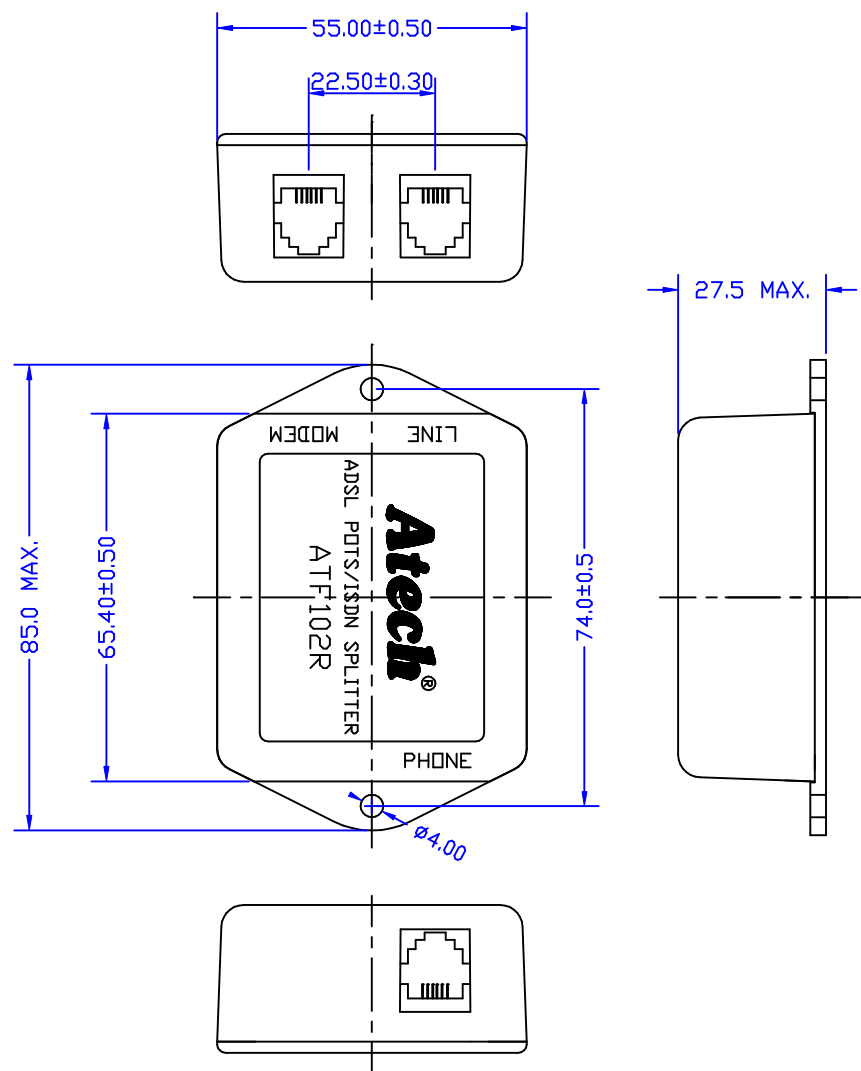


ELECTRICAL CHARACTERISTICS :

- DCR EACH LINE : 12.5 OHM MAX.
- FREQ. PULSE METERING
INSERTION LOSS :
(@ 12 KHZ) = 3 dB MAX.
(@ 16 KHZ) = 3 dB MAX.
- POTS : (600 OHMS OR 270 OHMS + (750 OHMS / 150nF))
INSERTION LOSS :
(@ 200 HZ) = 1 dB MAX.
(@ 1 KHZ) = 1 dB MAX.
(@ 3.6 KHZ) = 1 dB MAX.
RETURN LOSS :
(@ 300 HZ) = 14 dB MIN.
(@ 2 KHZ) = 14 dB MIN.
(@ 3.4 KHZ) = 11 dB MIN.
- ISDN : (135/150 OHM)
INSERTION LOSS :
(@ 1 KHZ) = 0.8 dB MAX.
(@ 40 KHZ) = 0.8 dB MAX.
(@ 80 KHZ) = 2 dB MAX.
RETURN LOSS :
(@ 4 KHZ) = 16 dB MIN.
(@ 40 KHZ) = 16 dB MIN.
(@ 80 KHZ) = 14 dB MIN.
- ATTENUATION
(@ 150 KHZ) = 65 dB MIN.
(@ 1.1 MHZ) = 65 dB MIN.
(@ 2.2 MHZ) = 55 dB MIN.
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE ADSL POTS/ISDN SPLITTER	
								DWG. NO. ATF102R	
	RELEASE	02/07/2006	PAIR	MIC	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						02/07/06			