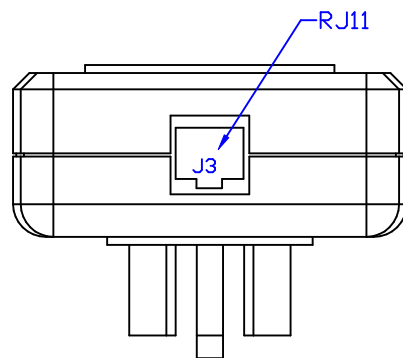
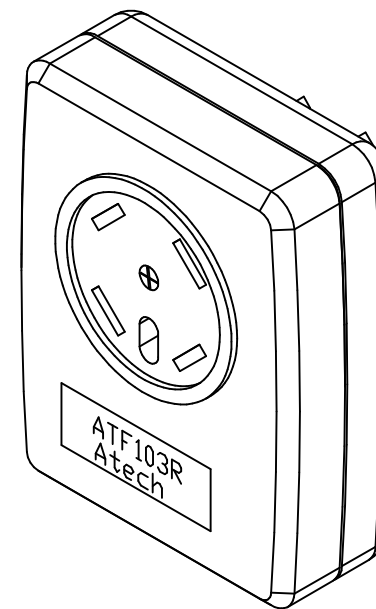
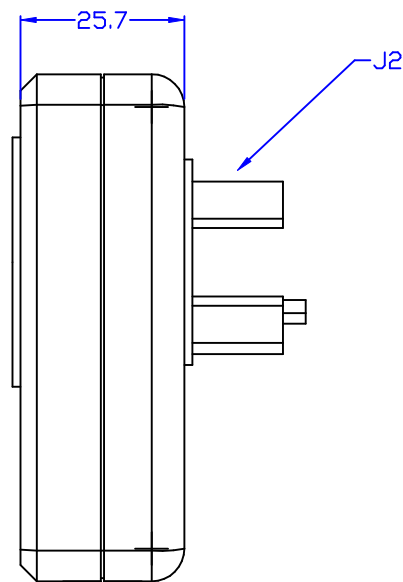
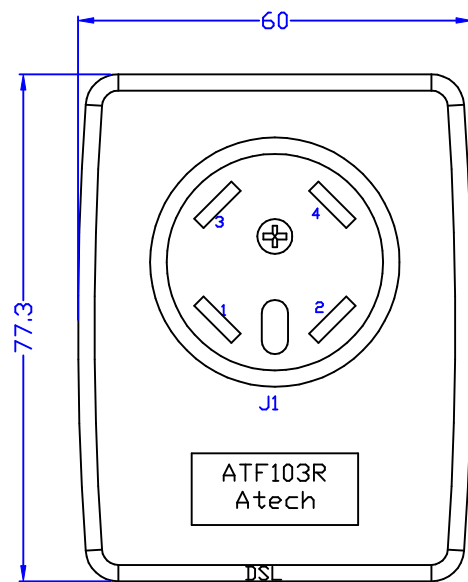


ELECTRICAL CHARACTERISTICS :

1. POTS PORT IMPEDANCE : 270 OHM+(750 OHM//150nF)
2. INSERTION LOSS 1004HZ : 1.0 dB MAX.
3. VOICE BAND ATTENUATION 0.2~4KHZ : +/-1dB MAX.
4. ADSL BAND ATTENUATION 32K~138KHZ 45dB MIN.
138K~1104KHZ : 55dB MIN.
5. DCR : <50 OHM
6. INSULATION RESISTANCE TIP TO RING : >25M OHM
7. RETURN LOSS(300~3400HZ) 14dB MIN.
(500~2000HZ) 18dB MIN.
8. RoHS COMPLIANT

CONNECTOR	FUNCTION	STYLE	TIP	RING
J3	DSL	RJ11	PIN3	PIN4
J2	LINE	PLUG	PIN1	PIN2
J1	PHONE	SOCKET	PIN1	PIN2

						Atech®		TITLE CPE SIDE	
						Atech Technology Co., Ltd.		ADSL POTS SPLITTER	
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.	
								ATF103R	
						UNITS:		SAFETY	
						M/M			
						DATE		P/N:	
						04/07/06			
						REVISIONS		DRAW	
								Pair	