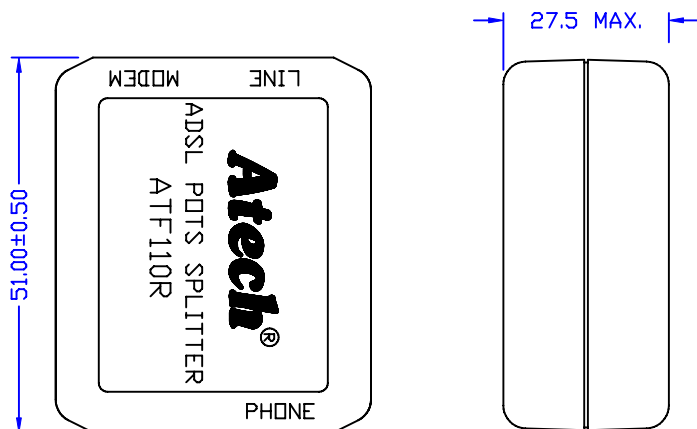



ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 12.5 OHM MAX.
2. INSERTION LOSS (@1KHZ) : 0.3dB MAX.
3. INSERTION LOSS DISTORTION (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS (@300HZ-500HZ) : 14dB MIN.
(@500HZ-2KHZ) : 18dB MIN.
(@2KHZ-3.4KHZ) : 14dB MIN.
5. LONGITUDINAL BALANCE (@300HZ-3.4KHZ) : 52dB MIN.
6. ATTENUATION (@25KHZ-1.1MHZ) : 65dB MIN.
(@1.1MHZ~2.2MHZ) : 55dB MIN.
7. POTS LOOP CURRENTS : 120mA
8. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL POTS SPLITTER	
								DWG. NO. ATF110R	
	RELEASE	12/11/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	SHEET 1 OF 1
REVISIONS						12/11/06		CSA06000XA	DRAW <i>Pair</i>