

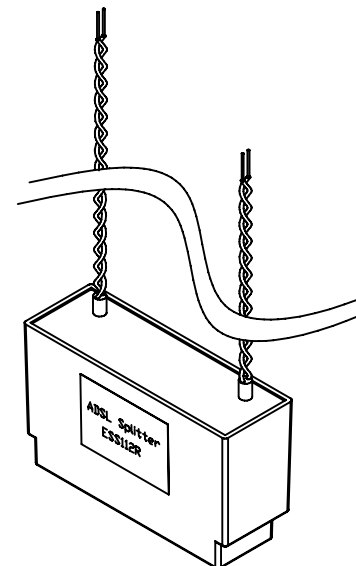
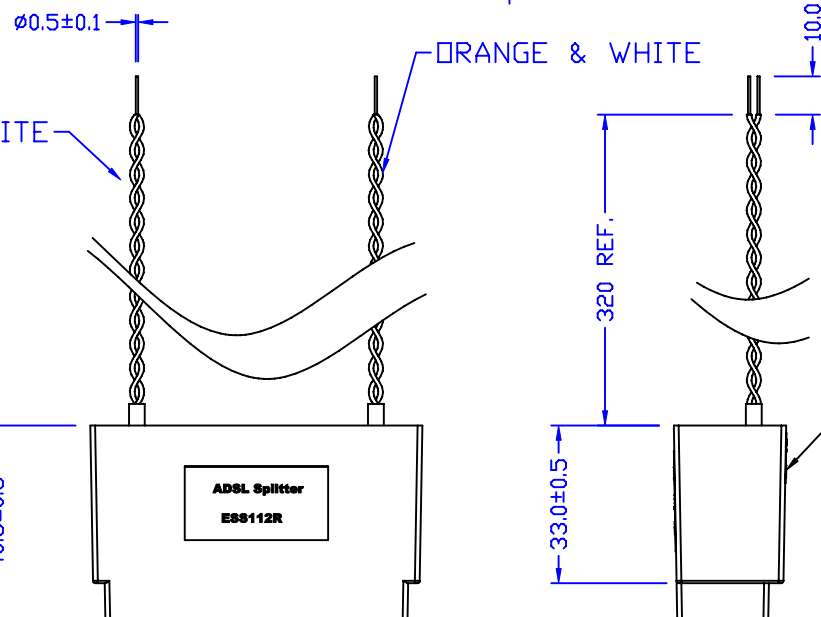


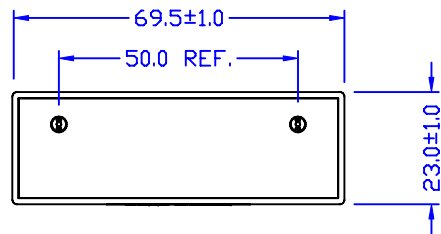

or/wh pr to LINE and DATA wiring.
bl/wh pr to PHONE wiring.

ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE: BT3,370 OHM+(620 OHM//310nF)
ZCOMPLEX, 270OHM+(150uF//750 OHM)
2. DCR LOOP : 25 OHM MAX.
3. INSERTION LOSS (@1KHZ) : 1dB MAX.
4. INSERTION LOSS DISTORTION (@200HZ-4KHZ) : ± 1.5 dB
5. RETURN LOSS (@300HZ-3.4KHZ) : 14dB MIN.
(@500HZ-2KHZ) : 18dB MIN.
6. LONGITUDINAL BALANCE (@25KHZ-2.2MHZ) : 60dB MIN.
7. ATTENUATION (@25KHZ-2.2MHZ) : 60dB MIN.
8. RoHS COMPLIANT

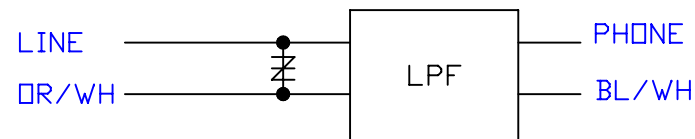

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE ADSL FILTER
								DWG. NO. ATF112R
	RELEASE	09/04 /2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						09/04/07	CFA027000D	