
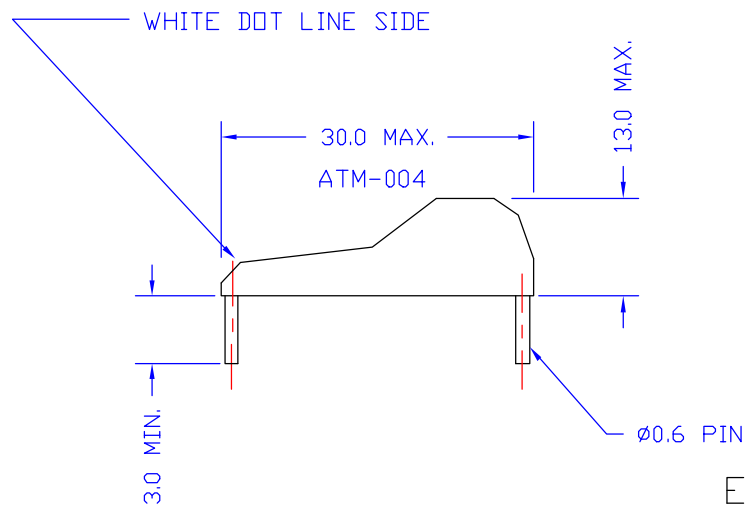


GRID 1 * 1

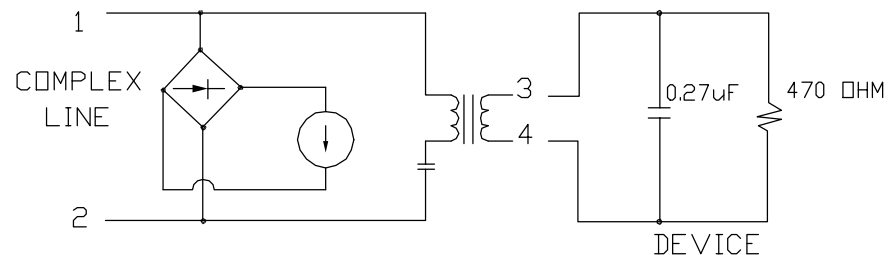

ELECTRICAL CHARACTERISTICS:

- 1 DC. VOLTAGE : PIN 1-2(@ 80mADC) = 9.5V MAX.
1-2(@ 120mADC) = 12.5V MAX.
- 2 D.C.R. : PIN 3-4 = 38 ΩHM +/- 10%
- 3 INSERTION LOSS (<@ 1KHZ,1Vrms, W/H 470 ΩHM // 0.27µF LOAD>
@80mADC = 1db MAX. @120mADC = 1db MAX.
- 4 FREQ. RESP.(300HZ TO 4KHZ) : @80mADC = 0.35db MAX.
@120mADC = 0.35db MAX.
- 5 RETURN LOSS (REF. "(820 ΩHM // 115nF)" + 220 ΩHM W/H 80mADC):
@200HZ = 10db MIN. @500HZ = 15.5db MIN.
@2500HZ = 17.5db MIN. @4000HZ = 12db MIN.
- 6 THD(@300HZ, W/H 80mADC) : -50db MAX.
- 7 LONGITUDINAL BALANCE : 75db MIN. 200-4KHZ
- 8 HI-POT (<@3750V, 1mA, 1MINUTE>) : LINE-DEVICE
9. LEAD-FREE WITH RoHS

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE COMPLEX COUPLING MODULE	
							DWG. NO. ATM-004N	
	RELEASE	05/25/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						05/25/05	DRAW <i>Pair</i>	