

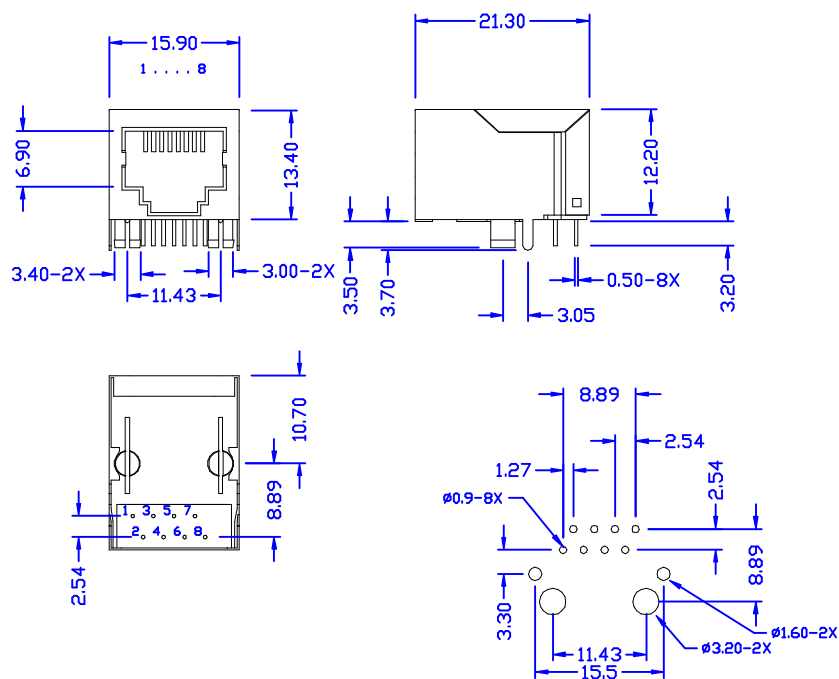




UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm 0,25$

BLOCK CIRCUIT x 1 SET IN ATM-073D

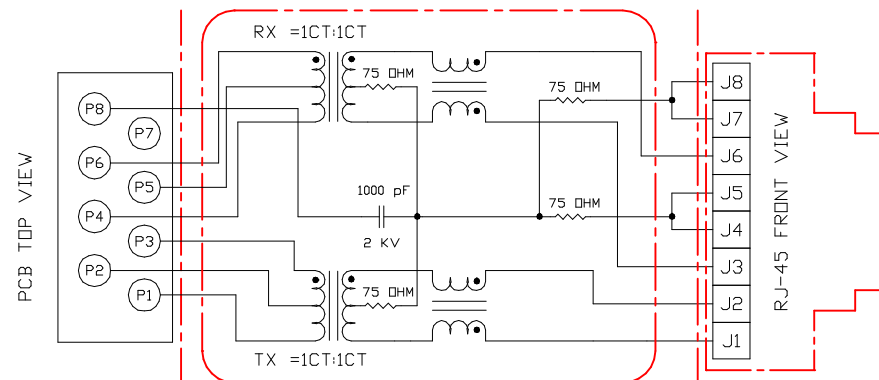

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 uH MIN.
2. TURNS RATIO : TX = 1CT:1CT $\pm 5\%$,
RX = 1CT:1CT $\pm 5\%$.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS: 1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30MHZ = -20 dB MIN,
30~60MHZ = -14 dB MIN,
60~80MHZ = -13 dB MIN.
6. CROSS TALK : 1~100MHZ = -30 dB MIN.
7. CMRR : 1~100MHZ = -30 dB MIN.

						 Atech[®] Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8804	TITLE 10/100 BASE-T LAN-MATE	
A	PIN NO.	02/02/2005	BART	AL	SUEDY		DWG. NO. ATM-073D	
	RELEASE	09/06/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/06/04	DRAW <i>Pair</i>	
REVISIONS								