

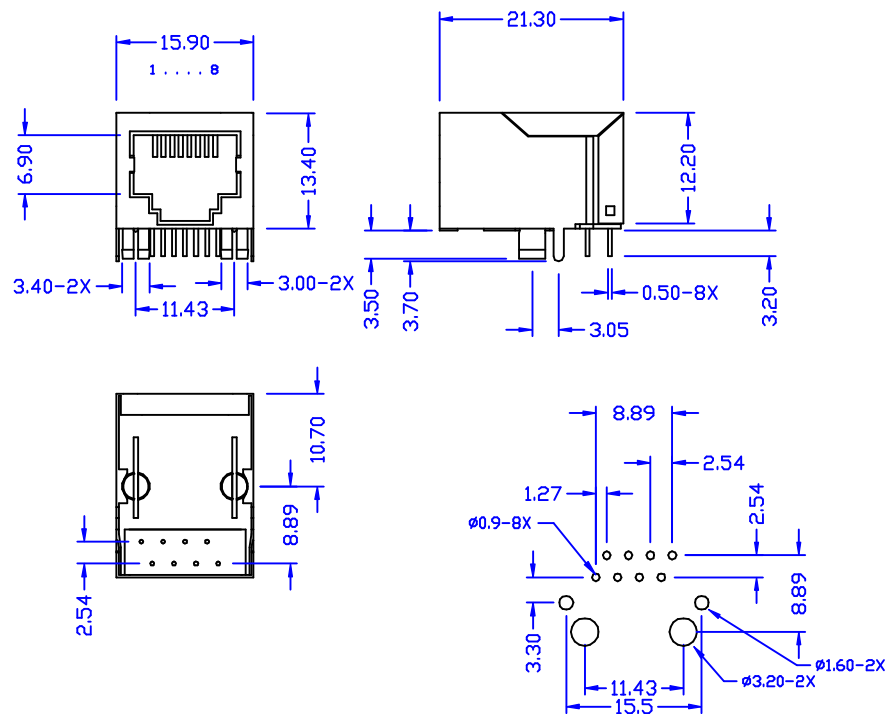


ATM-073E
Atech
yyww



PCB LAYOUT MOUNTING HOLE(TOP VIEW)

BLOCK CIRCUIT × 1 SET IN ATM-073E

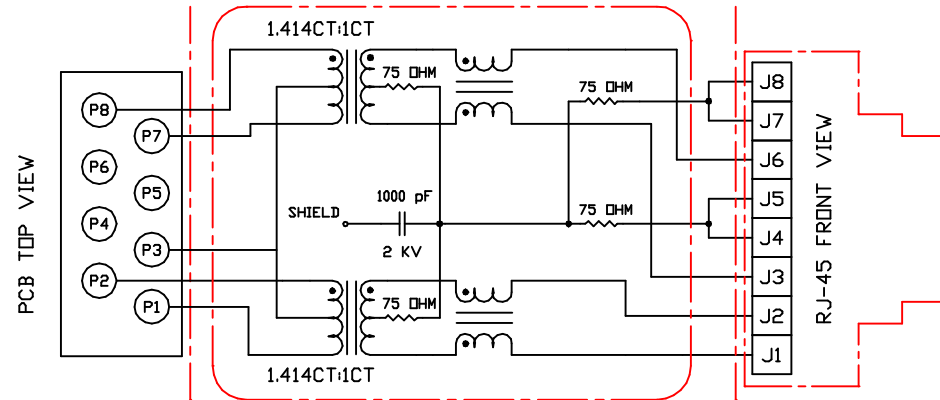

ELECTRICAL CHARACTERISTICS :

1. DCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 uH MIN.
2. TURNS RATIO : TX = 1.414CT:1CT ±5%,
RX = 1.414CT:1CT ±5%.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS: 1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30MHZ = -18 dB MIN.
30~60MHZ = -16 dB MIN.
60~80MHZ = -12 dB MIN.
6. CROSS TALK : 1~100MHZ = -35 dB MIN.
7. CMRR : 1~100MHZ = -30 dB MIN.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

						Atech®		TITLE 10/100 BASE-T LAN-MATE	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:02794-6667 FAX:02794-8004		ATM-073E	
RELEASE		09/07/2004	BART	AL	SUEDY	UNITS:		SAFETY	
NO:		DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						09/07/04		Pair	