
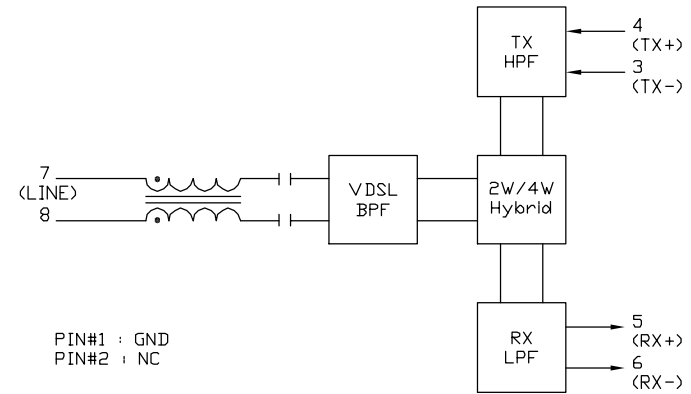
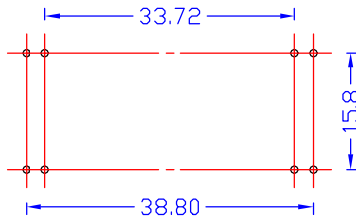

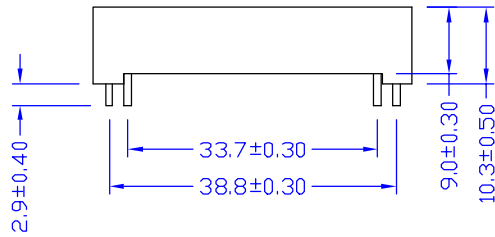


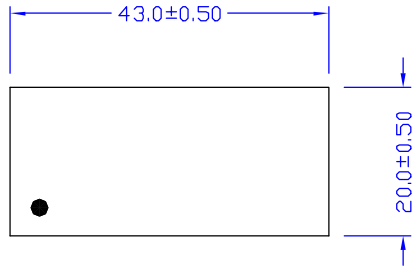

Description	Passband Frequency	Insertion Loss (Max)	Return Loss(Min)	Stopband Frequency	Attn. (Min)	Impedance
VDSL BPF	900KHZ TO 7.9MHZ	0.8 dB	10 dB	20KHZ TO 250KHZ	50 dB	100 ohms
RX LPF	900KHZ TO 3.3MHZ	0.8 dB	12 dB	4.0MHZ TO 7.9MHZ	50 dB	270 ohms
TX HPF	4.0MHZ TO 7.9MHZ	0.8 dB	10 dB	900KHZ TO 3.3MHZ	15 dB	40 ohms

						Atech® Atech Technology Co., Ltd. TEL 022794-6667 FAX 022794-8004		TITLE	VDSL CPE MODULE
								DWG. NO.	ATM-074C
	RELEASE	07/08/2005	BART	EUGENE	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						07/08/05		DRAW	Pair