
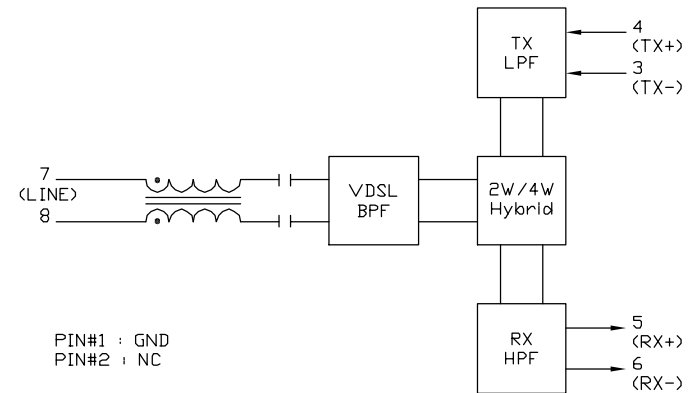
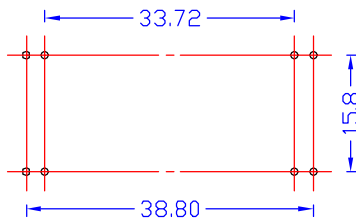

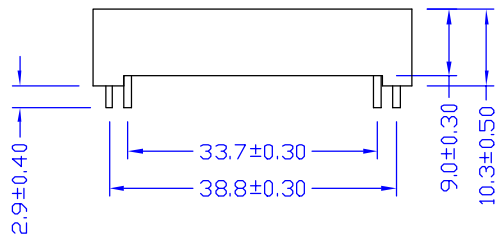


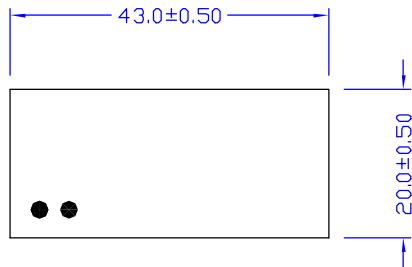

Description	Passband Frequency	Insertion Loss (Max)	Return Loss(Typ)	Stopband Frequency	Attn. (Min)	Impedance
VDSL BPF	900KHZ TO 7.9MHZ	0.8 dB	10 dB	20KHZ TO 250KHZ	50 dB	100 ohms
RX HPF	4.0MHZ TO 7.9MHZ	0.8 dB	12 dB	900KHZ TO 3.3MHZ	50 dB	270 ohms
TX LPF	900KHZ TO 3.3MHZ	0.8 dB	10 dB	4.0MHZ TO 7.9MHZ	15 dB	40 ohms

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004		TITLE	VDSL C/D MODULE
								DWG. NO.	ATM-075C
	RELEASE	07/08/2005	BART	EUGENE	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	DRAW <i>Pair</i>
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	07/08/05		