

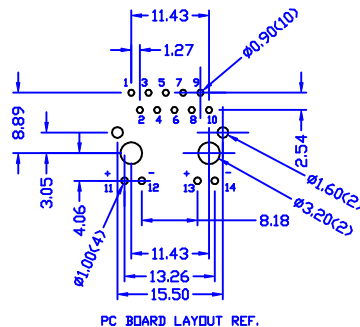


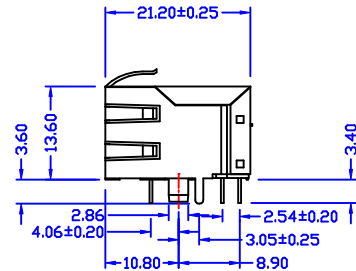






UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

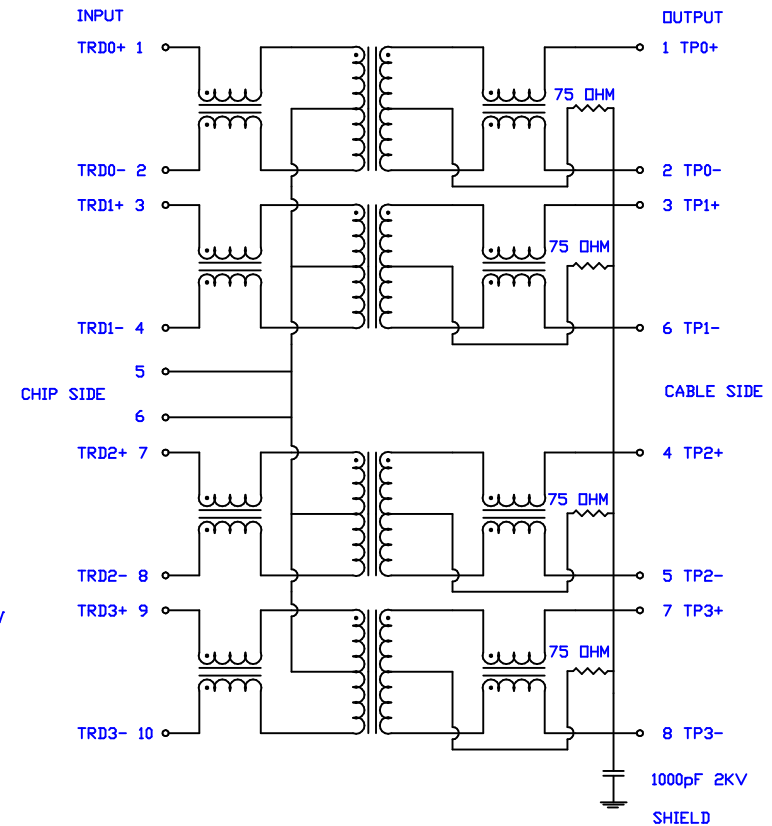

ELECTRICAL CHARACTERISTICS :

1. INSERTION LOSS : 1~60MHZ = -0.5 dB MAX.
60~100MHZ = -1.0 dB MAX.
100~125MHZ = -1.2 dB MAX.
2. RETURN LOSS : 1~30MHZ = -16 dB MIN. LOAD 100 OHM
30~40MHZ = -13.5 dB MIN. LOAD 100 OHM
40~50MHZ = -11.5 dB MIN. LOAD 100 OHM
50~80MHZ = -10 dB MIN. LOAD 100 OHM
3. CROSS TALK : 1~30MHZ = -40 dB MIN.
30~60MHZ = -38 dB MIN.
60~100MHZ = -33 dB MIN.
4. CMRR : 1~100MHZ = -30 dB MIN.
5. ISOLATION : @60HZ, INPUT TO OUTPUT 1500Vrms, 1 MINUTE
6. PRIMARY INDUCTANCE : @100KHZ, 0.1Vrms, 8mA DC BIAS 350 uH MIN.

						Atech®		TITLE 10/100 /1000 LAN-MATE	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATM-081	
RELEASE	09/13/2004	BART	AL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1	
ND	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW	
REVISIONS						09/13/04		Pair	