
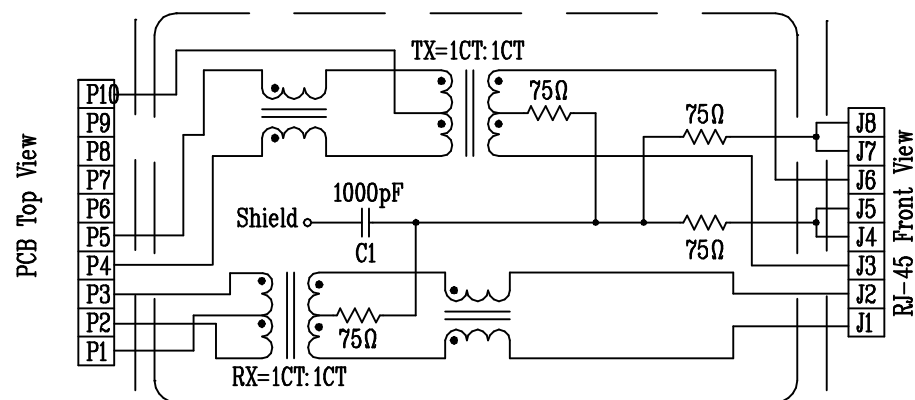


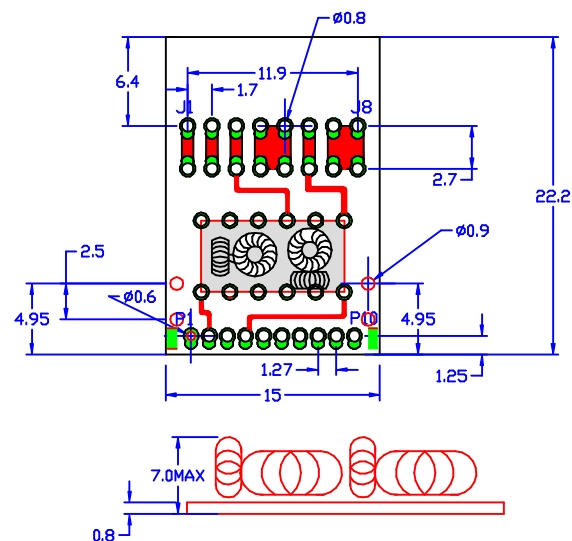

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO TX/RX : 1CT:1CT/1CT:1CT
2. $\square$ CL (@100KHZ/0.1V WITH 8mA/DC BIAS) : 350 μ H MIN.
3. L.L (@100KHZ/0.2V) : 0.4 μ H MAX.
4. CROSS TALK : 0.1~100MHZ = -35 dB MIN.
5. INSERTION LOSS : 1~100MHZ = -1.0 dB MAX.
6. RETURN LOSS (@100 $\square$ HM) :
 - 1~30 MHZ = -18 dB MIN.
 - 30~60 MHZ = -16 dB MIN.
 - 60~80 MHZ = -12 dB MIN.
7. HI-POT : 1500 Vrms.
8. RISE TIME : 10~90% = 2.5 ms

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE 0.25

						Atech® Atech Technology Co., Ltd. TEL:02(2794-6667 FAX:02(2794-8004	TITLE MODULE LAN MATE		
							DWG. NO. ATM-087		
	RELEASE	01/18/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						01/18/05			