
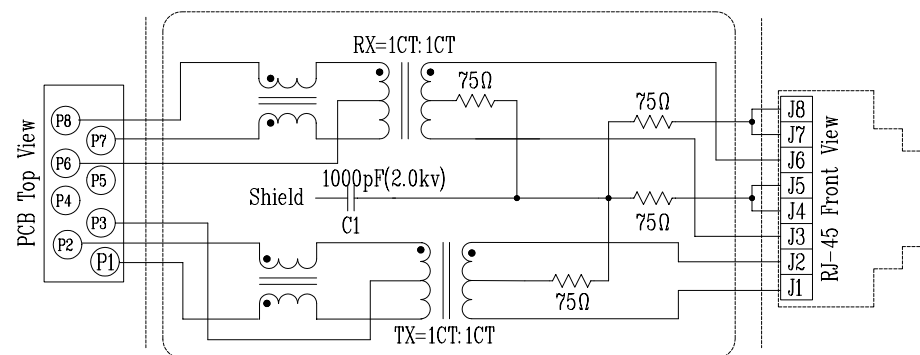


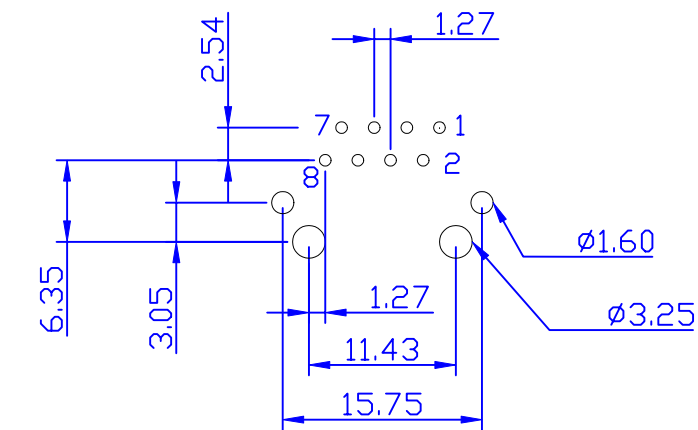

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 uH MIN.
2. TURNS RATIO : 1CT:1CT ±3%.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS : 1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30 MHZ = -20 dB MIN.
30~60 MHZ = -17 dB MIN.
60~80 MHZ = -15 dB MIN.
6. DCR : P1-P2,J3-J6,J1-J2 = 1.0 Ω MAX.
P7-P8 = 1.2 Ω MAX.
7. CROSS TALK : 1~100 MHZ = -30 dB MIN.
8. CMRR : 1~100 MHZ = -30 dB MIN.

						Atech[®] Atech Technology Co., Ltd. TEL 02-2794-6667 FAX 02-2794-8004		TITLE LAN-MATE	
								DWG. NO. ATM-094	
	RELEASE	03/14 /2005	BART	AL	SUEDY	UNITS: mm		SAFETY	SHEET OF
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/14/05			
REVISIONS									