

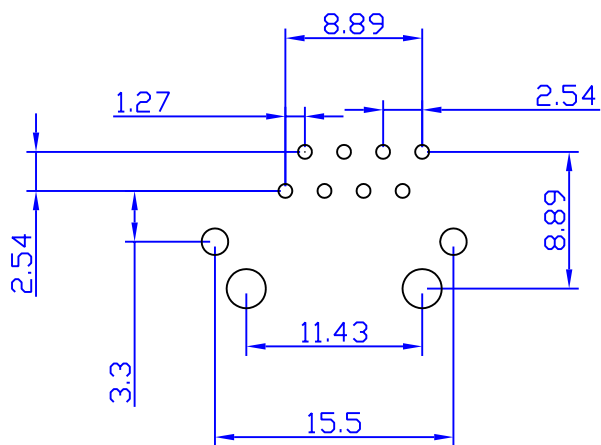


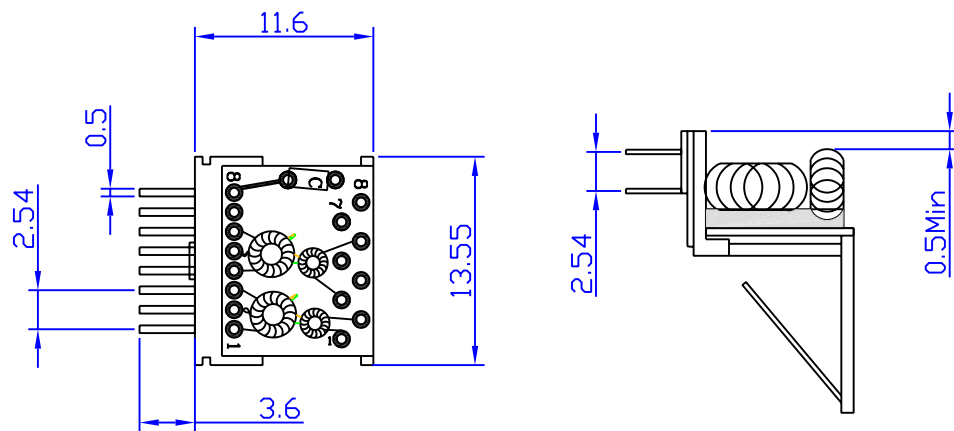

PCB LAYOUT MOUNTING HOLE (TOP VIEW)

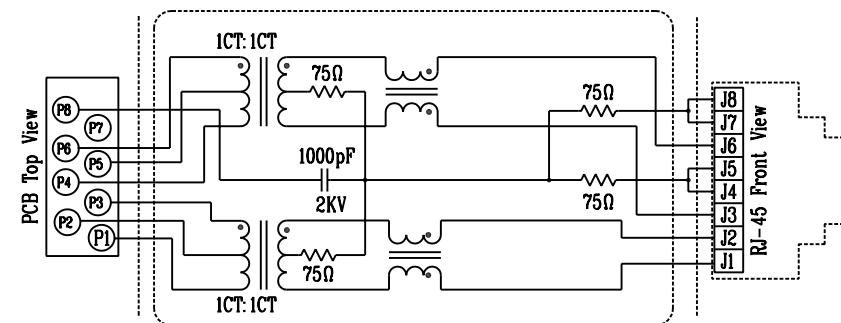

ELECTRICAL CHARACTERISTICS :

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 μ H MIN.
2. TURNS RATIO : TX = 1CT:1CT $\pm$ 3%
RX = 1CT:1CT $\pm$ 3%.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS :
1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -11 dB MIN.
6. CROSS TALK : 1~100 MHZ = -35 dB MIN.
7. CMRR : 1~100 MHZ = -30 dB MIN.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE LAN-MATE		
								DWG. NO. ATM-095		
	RELEASE	03/16/2005	BART	AL	SUEDY	UNITS: mm	SAFETY		SHEET OF	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/16/05			DRAW <i>Pair</i>	
REVISIONS										