

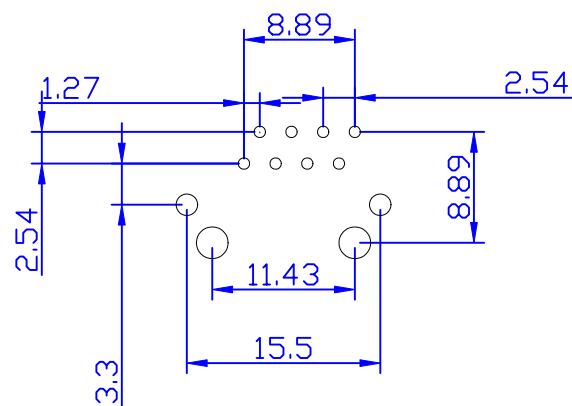


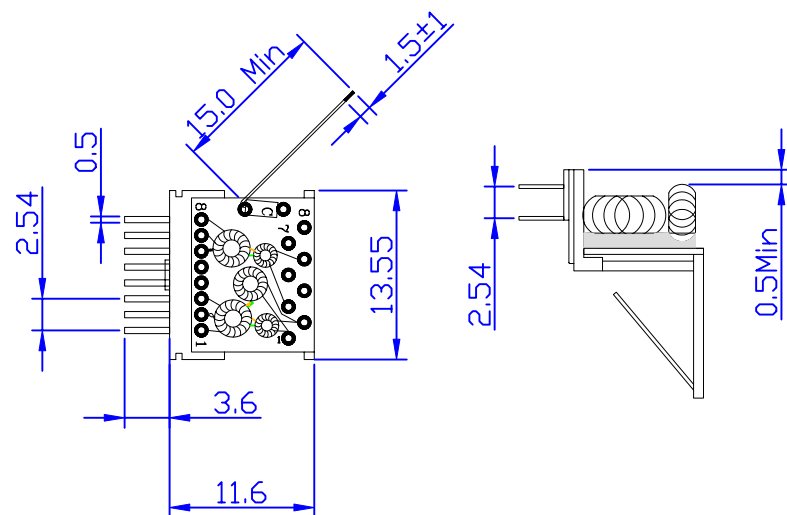

PCB LAYOUT MOUNTING HOLE (TOP VIEW)

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

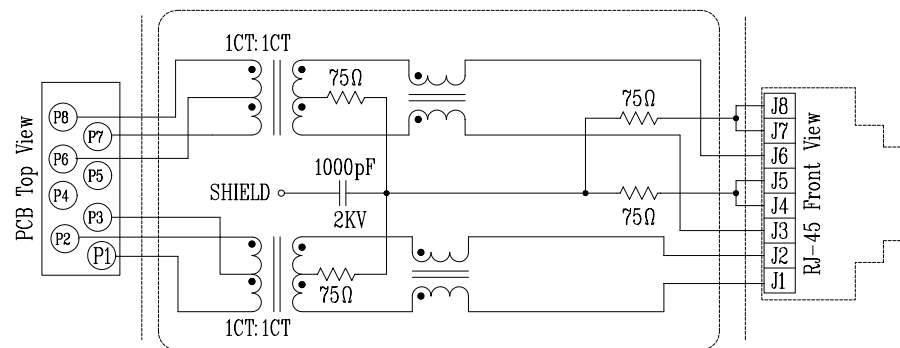

ELECTRICAL CHARACTERISTICS :

1. DCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 μ H MIN.
2. HI-POT : 1500 Vrms.
3. INSERTION LOSS : 1~100MHZ = -1.0 dB MAX.
4. RETURN LOSS : 1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -11 dB MIN.
5. TURNS RATIO : P1-P2:J1-J2 = 1CT:1CT $\pm 5\%$.
P7-P8:J3-J6 = 1CT:1CT $\pm 5\%$.
6. CROSS TALK : 1~100 MHZ = -30 dB MIN.

						Atech®		TITLE
						Atech Technology Co., Ltd.		LAN-MATE
						TEL:0022794-6667 FAX:0022794-9004		DWG. NO.
						UNITS: mm		ATM-097
						DATE		SHEET OF
						03/16/05		DRAW
						SAFETY		Pair
REVISIONS								
NO	DESCRIPTION	DATE	BY	CHK	APPD			
	RELEASE	03/16/2005	BART	AL	SUEDY			