


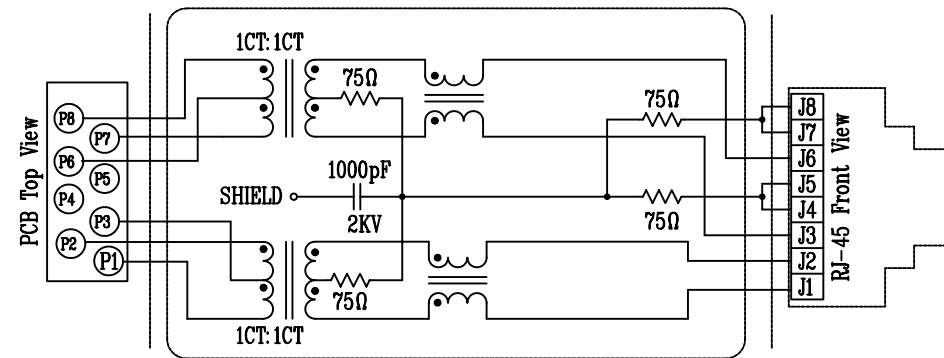

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 uH MIN.
2. HI-POT : 1500 Vrms.
3. INSERTION LOSS : 1~100MHZ = -1.0 dB MAX.
4. RETURN LOSS : 1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -11 dB MIN.
5. TURNS RATIO : P1-P2;J1-J2 = 1CT:1CT $\pm 5\%$.
P7-P8;J3-J6 = 1CT:1CT $\pm 5\%$.
6. CROSS TALK : 1~100 MHZ = -30 dB MIN.
7. LEAD FREE.

PCB LAYOUT MOUNTING HOLE (TOP VIEW)

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						 Atech [®] Atech Technology Co., Ltd. TEL 0212794-6667 FAX 0212794-8004		TITLE LAN-MATE	
								DWG. NO. ATM-097N	
	RELEASE	04/01/2005	BART	AL	SUEDY	UNITS: mm		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET OF	
REVISIONS						04/01/05		DRAW <i>Pair</i>	