
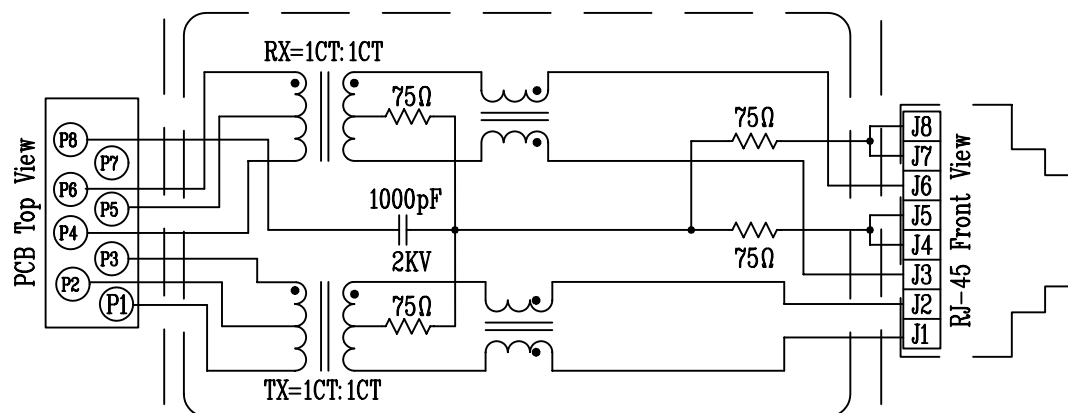
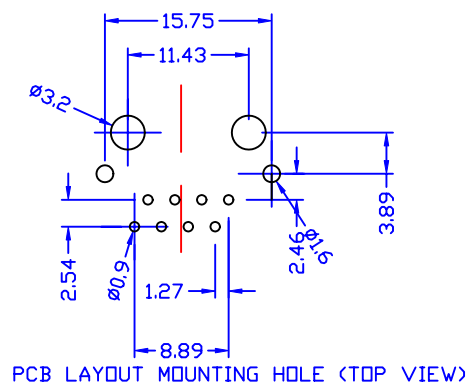
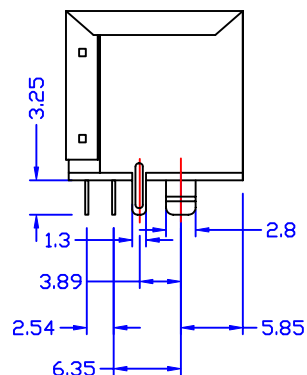




ELECTRICAL CHARACTERISTICS :

1. OCL (@100KHZ/0.1Vrms 8mA DC/BIAS) : 350 uH MIN.
2. DCR : P1-P3,J1-J2,J3-J6 = 1.0 OHM MAX.
P4-P6 = 1.2 OHM MAX.
3. HI-POT : 1500 Vrms.
4. INSERTION LOSS : 0.1~100MHZ = -1.0 dB MAX.
5. RETURN LOSS : 1~30 MHZ = -20 dB MIN.
30~60 MHZ = -15 dB MIN.
60~80 MHZ = -10 dB MIN.
6. CROSS TALK : 1~100 MHZ = -30 dB MIN.
7. TURNS RATIO : 1CT:1CT ±3%.
8. CMRR : 1~100 MHZ = -30 dB MIN.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm 0,25$

						 Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE LAN-MATE	
							DWG. NO. ATM-103	
	RELEASE	04/11/2005	BART	AL	SUDY	UNITS:	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE		
						04/11/05	DRAW	<i>Pair</i>