

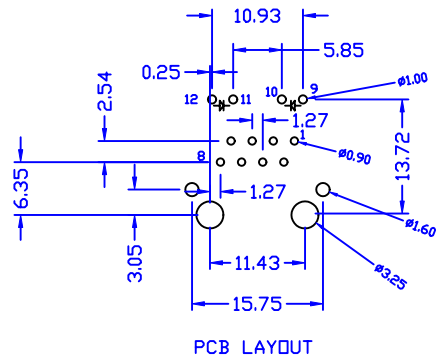
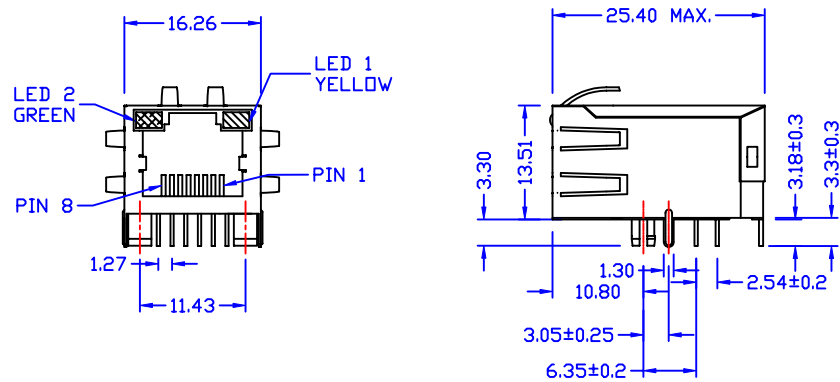




UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

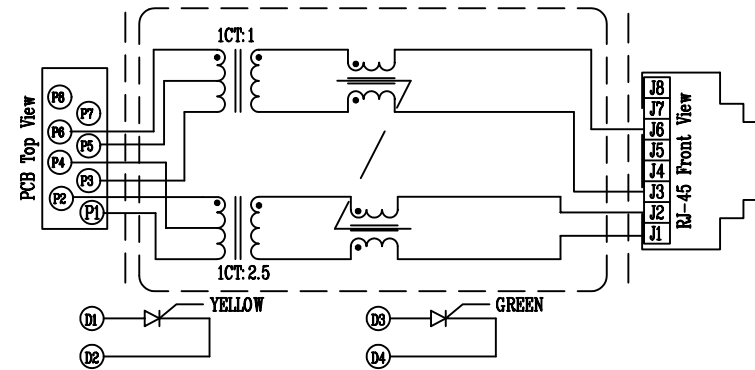

ELECTRICAL CHARACTERISTICS :

1. DCL (@100KHZ/0.05Vrms) : 200 μ H MIN.
2. DCR : P1-P2 = 0.35 OHM MAX.
P3-P6 = 0.35 OHM MAX.
3. HI-PDT : PRI TO SEC = 1500 Vrms.
TX TO RX = 500 Vrms.
4. CMR CHOKE DCL (@100KHZ/0.05Vrms) : 18 μ H TYP.
5. LL (@100KHZ/0.05Vrms) : 0.4 μ H MAX.
6. TURNS RATIO : TX = 1CT:2.5
RX = 1CT:1
7. CW/W (@100KHZ/0.05Vrms) : 25 pF MAX.

						Atech®		TITLE
						Atech Technology Co., Ltd.		LAN-MATE
						TEL:02(2794-6667 FAX:02(2794-8004		DWG. NO.
								ATM-106
RELEASE	04/11/2005	BART	AL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS					DATE	04/11/05		Pair