

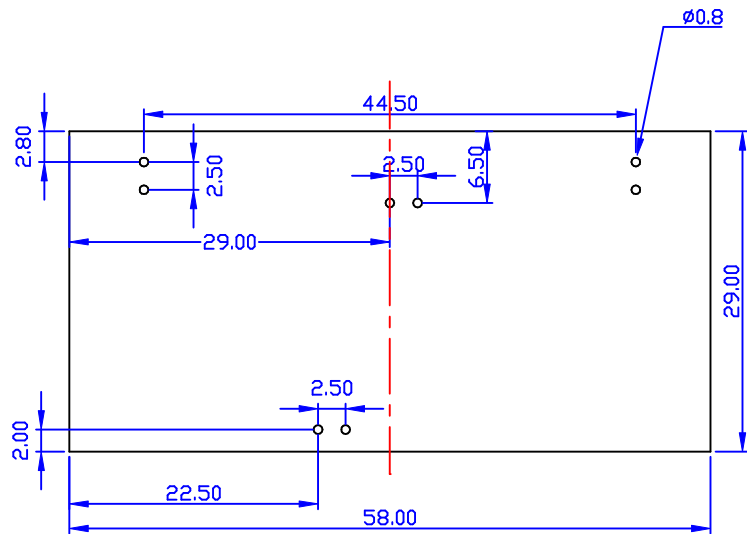


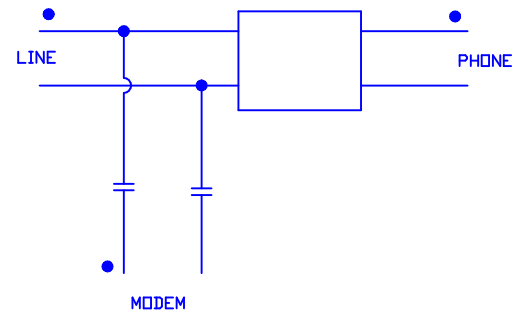


BOTTOM VIEW

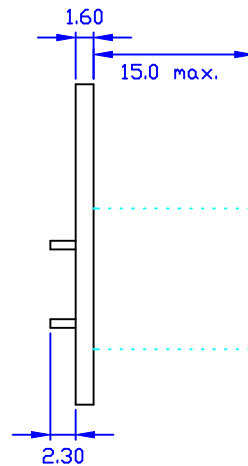

ELECTRICAL CHARACTERISTICS :

1. REF. ANNEX E OF ITU-T REC.G.992.1
2. DCR EACH LINE : 20 OHM MAX.
3. POTS 3dB CUTOFF FREQUENCY : 3.5 KHZ TYP.
4. INSERTION LOSS (@1KHZ) : 0.5 dB MAX.
5. ATTENUATION (@8KHZ) : 8 dB TYP.
(@20KHZ&ABOVE) : 60 dB TYP.
6. RETURN LOSS (@1KHZ) : 15 dB MIN.
7. DELAY DISTORTION (@200~4KHZ) : 150u SEC MAX.
8. POTS LOOP CURRENTS : 120 mA
9. POTS TIP TO RING DC VOLTAGE 0-200V
10. POTS RINGING SIGNAL FROM 15.3HZ TO 68HZ : 150 Vrms

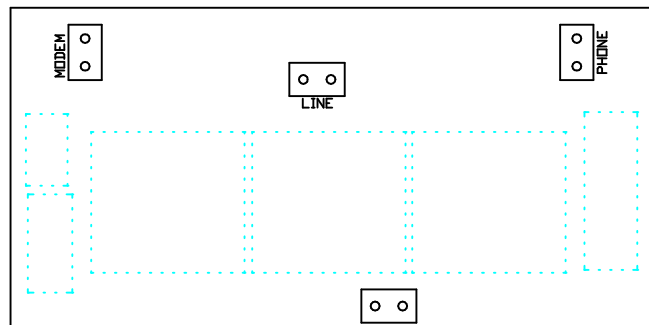

TOP VIEW

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE SPLITTER	
								DWG. NO. ATM-117	
	RELEASE	12/12/2005	pair	EUGENE	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/12/05			
REVISIONS								SHEET 1 OF 1	
								DRAW <i>Pair</i>	