
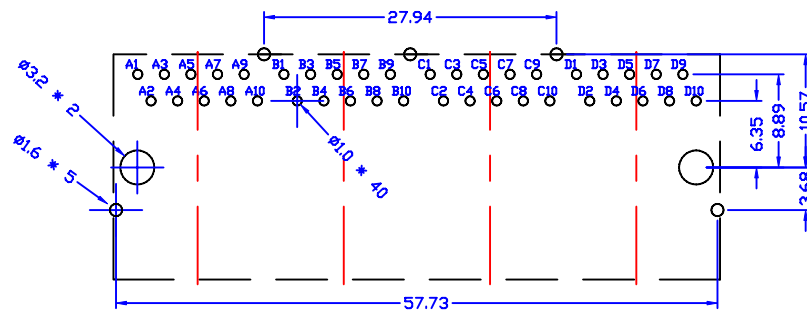
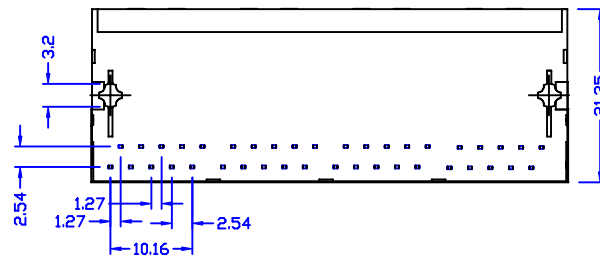




ATM-129R
Atech

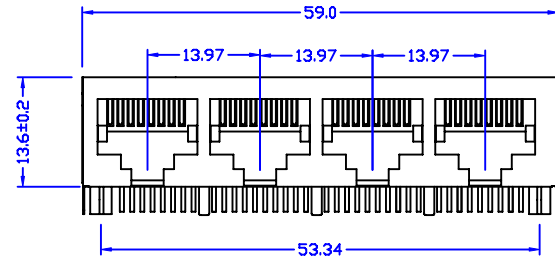

PC BOARD LAYOUT REF.(Top view)

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.3

BLOCK CIRCUIT * 4 SETS

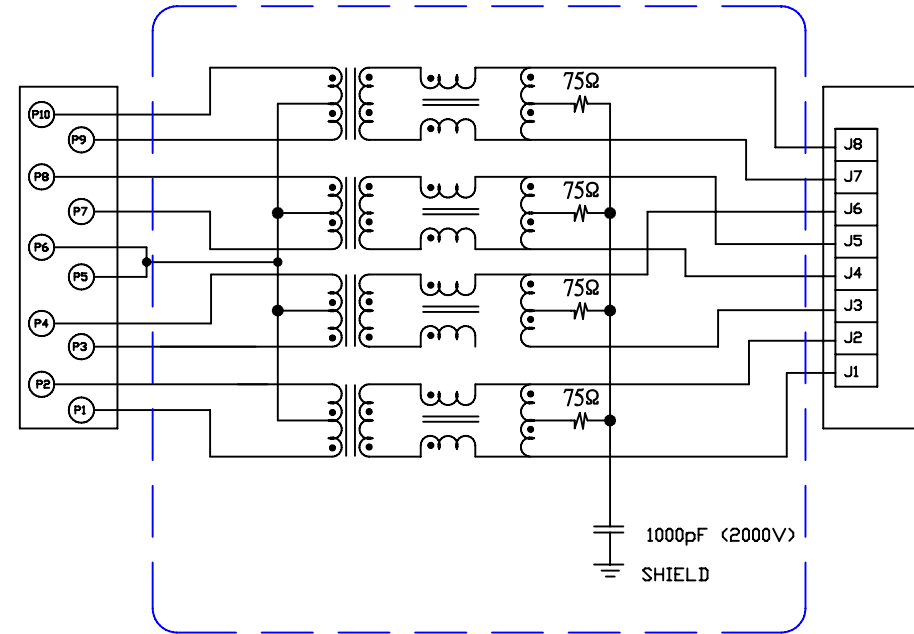

ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO : 1CT : 1 ±5%.
2. RISE TIME (10-90%):2.5ns TYP.
3. HI-POT : 1500 Vrms.
4. OCL(@100KHZ/0.1Vrms,WITH 8MA DC BIAS) : 350uH MIN.
5. INSERTION LOSS (@0.1-100MHZ) = -1.0 dB MAX.
6. RETURN LOSS : 1~30MHZ = -18dB MIN.
40MHZ = -14dB MIN.
50MHZ = -13.5dB MIN.
60~80MHZ = -12dB MIN.
100MHZ = -10 dB MIN.
7. RoHS COMPLIANT

					Atech®		TITLE 1000 LAN-MATE	
					Atech Technology Co. Ltd.		DWG. NO. ATM-129R	
					TEL:022794-6667 FAX:022794-8004			
RELEASE	12/20/2007	PAIR	WILLIE	EUGENE	UNITS: mm	SAFETY		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW Pair	
REVISIONS					12/20/07			