


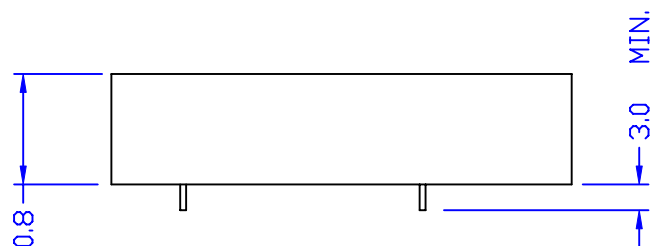


DOT PIN #1



0.5SQ. or Ø0.6PIN

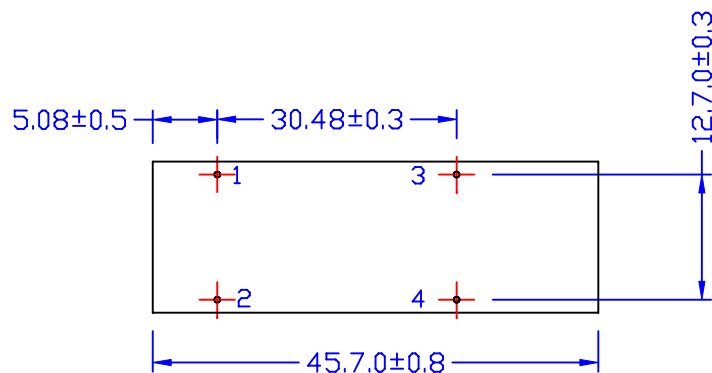

ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE : 600 ΩHM.
2. DCR : EACH LINE = 12.5 ΩHM MAX.
3. INSERTION LOSS : 1KHZ = 0.5 dB MAX.
4. INSERTION LOSS DISTORTION : 300HZ = ± 1 dB,
3.4KHZ = ± 1 dB.
5. RETURN LOSS : 3KHZ = 24 dB MIN.
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE ADSL		
								SPLITTER MODULE		
								DWG. NO.		
									ATM-130R	
	RELEASE	12/27/2007	Pair	Michael	Eugene	UNITS: M/M		SAFETY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE				
REVISIONS						12/27/07		SHEET 1 OF 1		
								DRAW <i>Pair</i>		