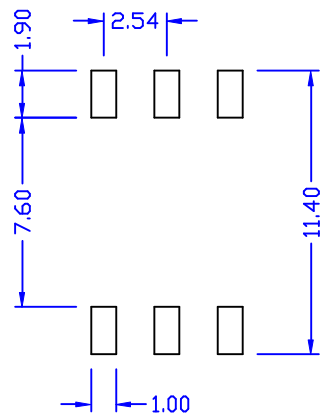
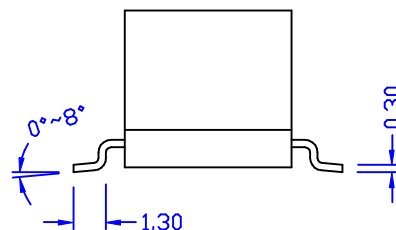
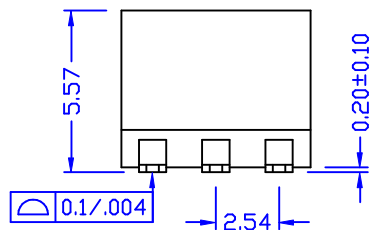
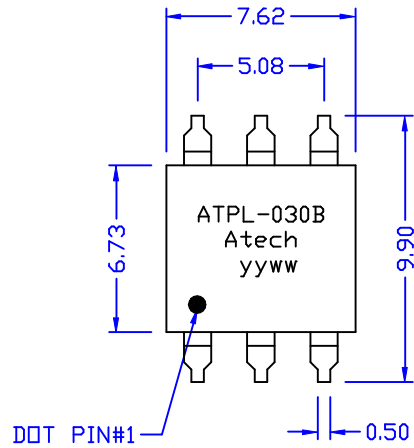


## ELECTRICAL CHARACTERISTICS :

1. TURNS RATIO (1±1%) : PIN 1-3 : 6-5 : 6-4 = 1 : 1 : 1.266
2. DCL : (<@100KHZ/20mV) PIN 1-3 = 1.5 mH TYP.
3. DCR : PIN 1-3 = 0.7 OHM MAX.
4. L.L : (<@100KHZ/1V) 0.5uH MAX.
5. HI-POT : 1500Vrms
6. CW/W : (<@100KHZ/1V) 35pF MAX.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

|             |  |            |      |     |       |                                 |          |              |
|-------------|--|------------|------|-----|-------|---------------------------------|----------|--------------|
|             |  |            |      |     |       | <b>Atech®</b>                   |          | TITLE        |
|             |  |            |      |     |       | Atech Technology Co., Ltd.      |          | TRANSFORMER  |
|             |  |            |      |     |       | TEL:022794-6667 FAX:022794-8004 |          | DWG. NO.     |
|             |  |            |      |     |       |                                 |          | ATPL-030B    |
| RELEASE     |  | 10/30/2003 | PAIR | AL  | SUEDY | UNITS:                          | SAFETY   | SHEET 1 OF 1 |
| DESCRIPTION |  | DATE       | BY   | CHK | APPD  | M/M                             |          | DRAW         |
| REVISIONS   |  |            |      |     |       | DATE                            | 10/30/03 |              |
|             |  |            |      |     |       |                                 |          | Pair         |