



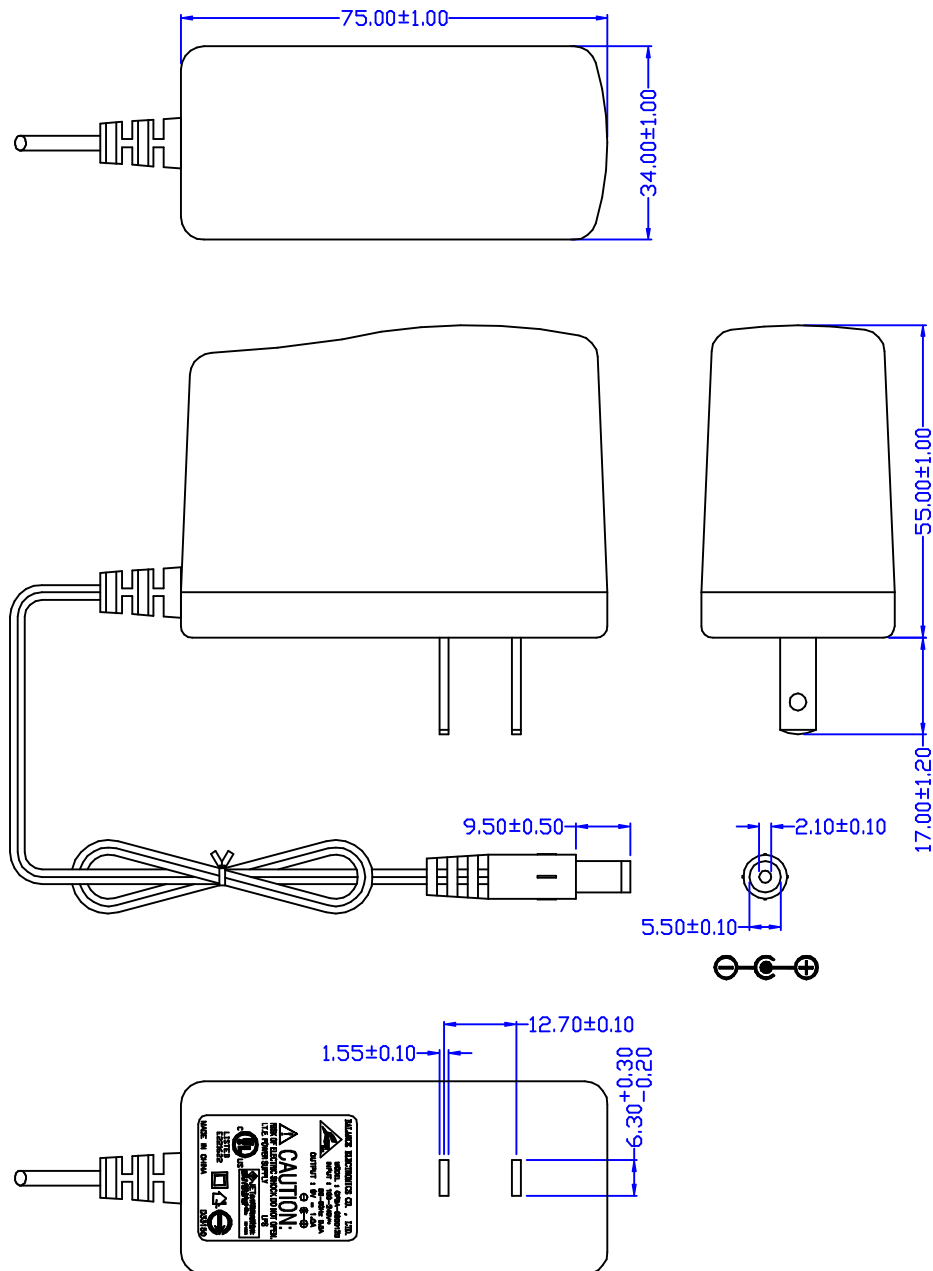

UL WALL MOUNT LABEL

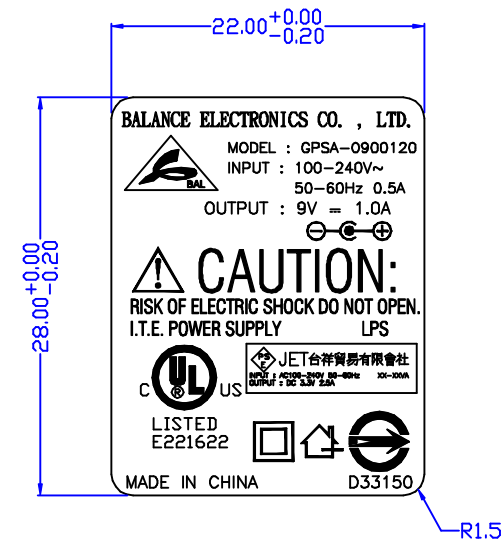

INPUT REQUIREMENTS :

- VOLTAGE :**
THE RANGE OF INPUT VOLTAGE IS FROM 100V_{ac} TO 240V_{ac}.
- FREQUENCY :**
THE RANGE OF INPUT FREQUENCY IS FROM 50Hz TO 60Hz.
- CURRENT :**
THE MAXIMUM INPUT CURRENT IS 0.5A AT 90V_{ac}.
- INRUSH CURRENT :**
THE INRUSH CURRENT WILL NOT EXCEED 30A AT 110V_{ac} INPUT, COLD START, 25°C

OUTPUT REQUIREMENTS :

- STATIC LOAD :**

OUTPUT	VOLTAGE	MINIMUM LOAD	MAXIMUM LOAD	PEAK LOAD
1	3.3V	0 A	2.5 A	

- OUTPUT VOLTAGE :**

OUTPUT	VOLTAGE	RANGE	TOLERANCE
1	3.3V	3.036-3.564V	±8%

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004		TITLE Switching Power Supply	
								DWG. NO. ATPS-013	
	RELEASE	05/09/2003	RDRY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/09/03			
REVISIONS									
								DRAW <i>Pair</i>	