

ELECTRICAL CHARACTERISTICS :

1. Input Rated Voltage and Frequency : 120 VAC 60 Hz.






2. Output Voltage and Current :

Input Volt.	Output Volt.	Rate Current	No Load Volt
120VAC/60Hz	DC12.5V Min	DC 0.5A	DC16.5V Max

3. Exciting Current : I(o):65mA (rms) max.at Nom. Voltage input 120V 60Hz.

4. Hi-Pot Test : 1800 Vac, one second, 5 mA, between input to output plug and core.

5. Insulation Test : DC 500 V 100 M Ω min, between input to output plug and core.

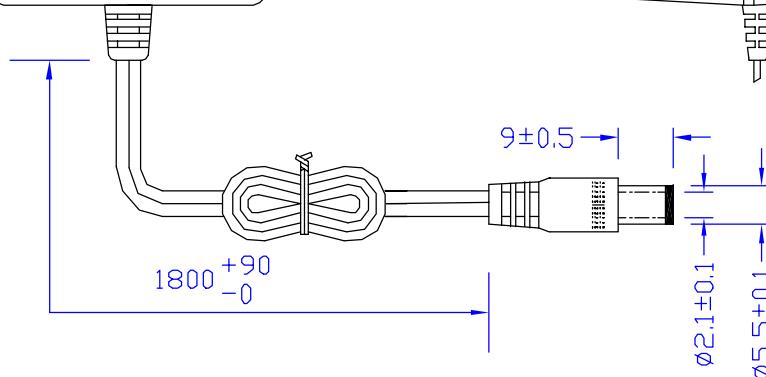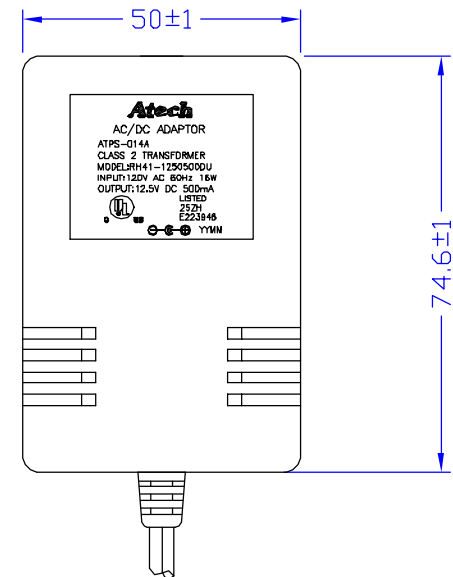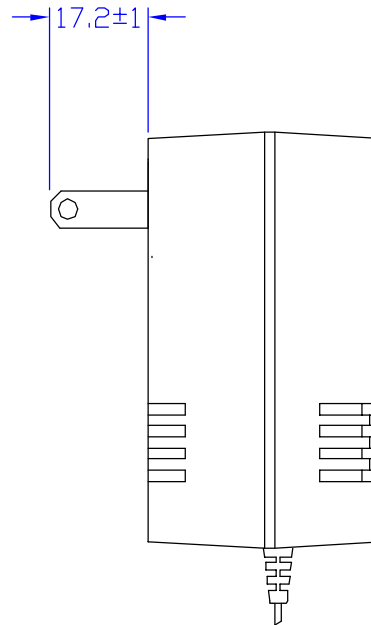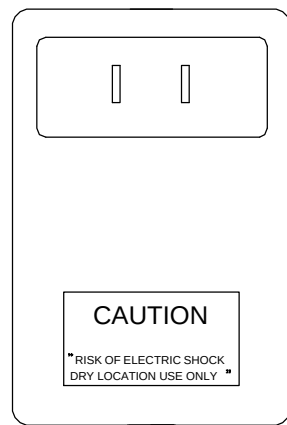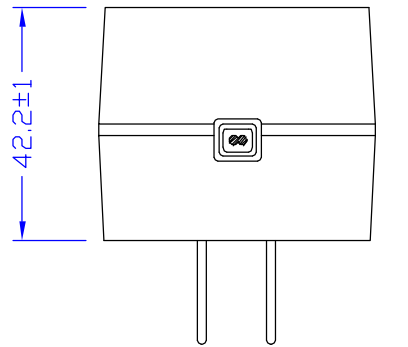

C	LABEL	08/16/2005	BART	AL	SUEDY	Atech Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	AC/DC ADAPTOR
B	DIM.	04/12/2005	BART	AL	SUEDY		DWG. NO.	ATPS-014A
A	SPEC. & DIM.	04/08/2005	BART	AL	SUEDY			
	RELEASE	03/02/2005	BART	AL	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE	03/02/05	Pair