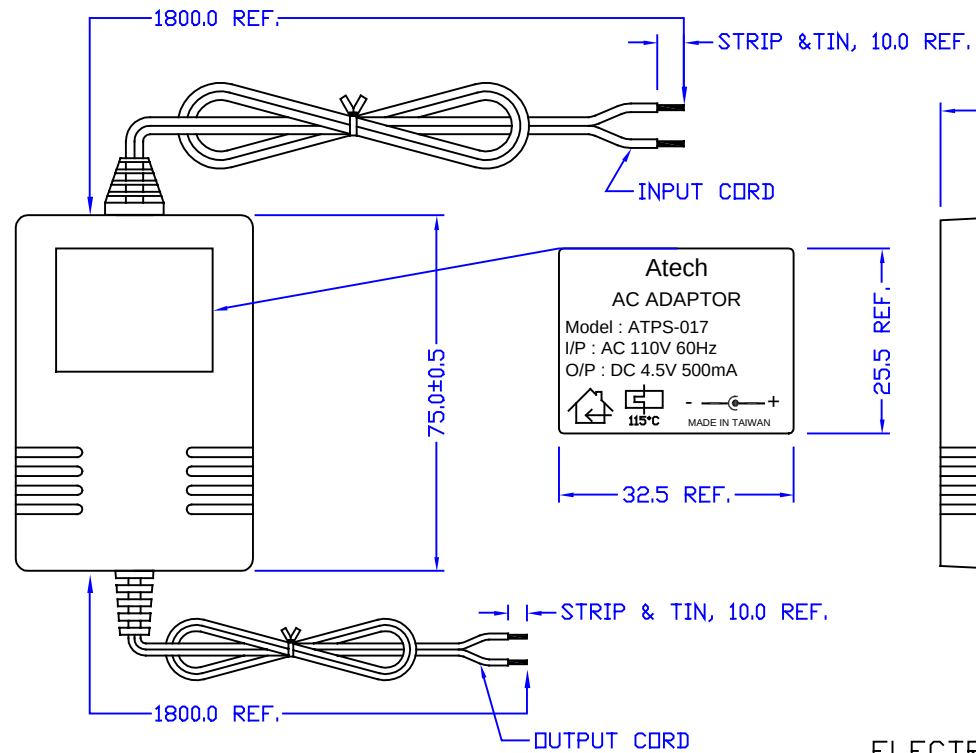


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 110V 60Hz.
2. SECONDARY RATED VOLTAGE REGULATION :

I/P VOLTAGE	RATED VOLTAGE	RATE CURRENT	NO LOAD VOLTAGE
AC 110V/60Hz	DC 4.5V±0.3V	DC 500mA	DC 5.00V±0.3V

3. EXCITING CURRENT : INPUT PRIMARY 110V 60Hz 80mA MAX.
4. HI-POT TEST : INPUT 60Hz 1000V FOR ONE MINUTE BETWEEN PRIMARY AND SECONDARY AND BETWEEN PRIMARY TO CORE. 500V FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500V DC 100M OHM MIN. WINDINGS AND CORE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE AC - DC ADAPTOR	
								DWG. NO. ATPS-017	
	RELEASE	06/29/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						06/28/04			