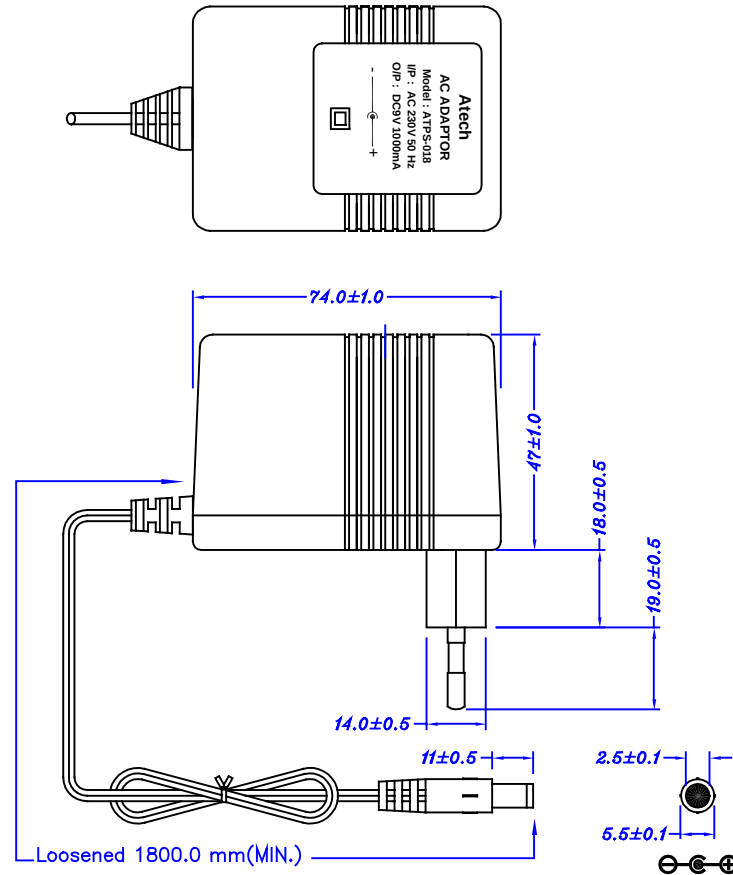


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 230V 50HZ.
2. SECONDARY RATED VOLTAGE REGULATION :

I/P	RATED VOLTAGE	RATE CURRENT	NO LOAD VOLTAGE
AC 230V/50Hz	DC 9.0V $\pm$ 5%	DC 1000mA	DC 13.9V $\pm$ 5%

3. EXCITING CURRENT : INPUT PRIMARY : 230V 60HZ 95 mA MAX.
4. HI-POT TEST : INPUT 60HZ 3750V FOR ONE MINUTE BETWEEN PRIMARY AND SECONDARY AND BETWEEN PRIMARY TO CORE, 600V FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 600V DC 100M OHM MIN. WINDINGS AND CORE.
6. HUMIDITY TEST : TEMP 32 $\pm$ 2 $^{\circ}$ C RELATIVE HUMIDITY 80% RH FOR 6 HOURS, AFTER KEEPING 30 MINUTE FOLLOWING INSULATION MUST BE LARGER THAN 5M OHM.
7. TEMPERATURE TEST : LESS THAN 55 $^{\circ}$ C FOR RATED TEST WITH RESISTANCE METHOD.

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2784-8887 FAX:(02)2784-8804		TITLE AC ADAPTOR DWG. NO. ATPS-018
						UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						08/06/04		