
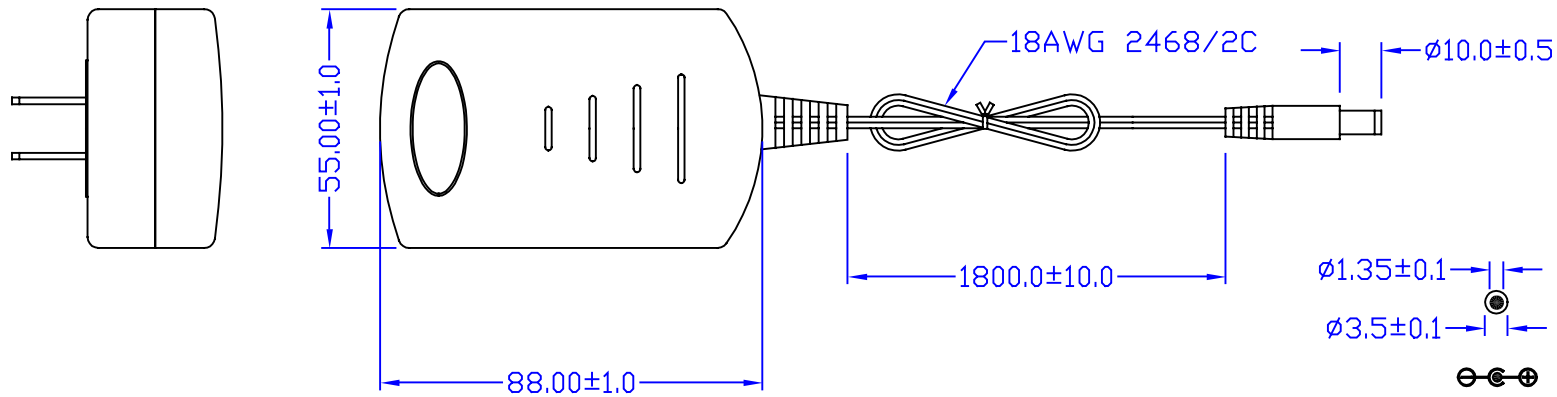


ELECTRICAL CHARACTERISTICS :

#	PARAMETER	UNIT	LIMIT VALUES	TEST CONDITIONS
1	INPUT VOLTAGE	VAC	100V~240VAC 50/60Hz	90~264VAC 50/60Hz
2	OUTPUT VOLTAGE	VDC	12V±5%	2.0A 12VDC ±5%
			12V±5%	0A 12VDC ±5%
3	INRUSH CURRENT	A	50 MAX	INPUT 240 VAC
4	HOLD-UP TIME	ms	10ms MIN	INPUT 100V OP/FULL LOAD
5	RISE TIME	ms	20ms MAX	
6	LEAKAGE CURRENT	mA	0.25	NOMINAL I/O
7	INPUT CURRENT	mA	50	RATED INPUT NOLOAD
8	RIPPLE+NOISE VOLTAGE	mVp-p	150mVp-p	150mVp-p MAX @2.0A
9	EFFICIENCY	%	75 MIN	75% MIN @MAX LOAD
10	LINE REGULATION	%	±2	
11	LOAD REGULATION	%	±4	
12	INSULATION RESISTANCE	MΩ	100	AT DC 500V

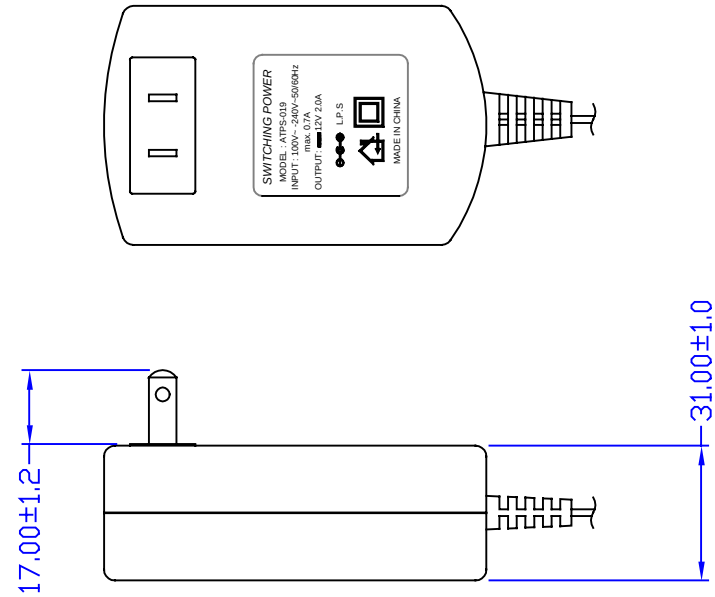

						Atech®		TITLE AC-DC POWER SUPPLY	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATPS-019	
RELEASE	08/17/2002	BART	AL	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW	
REVISIONS						DATE		Pair	
						08/16/04			