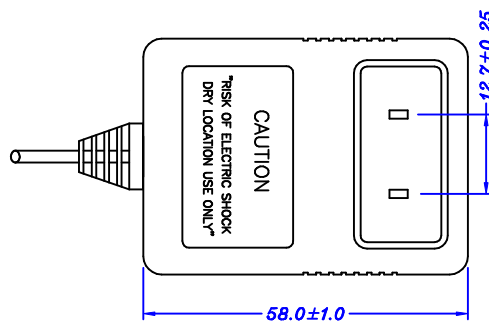
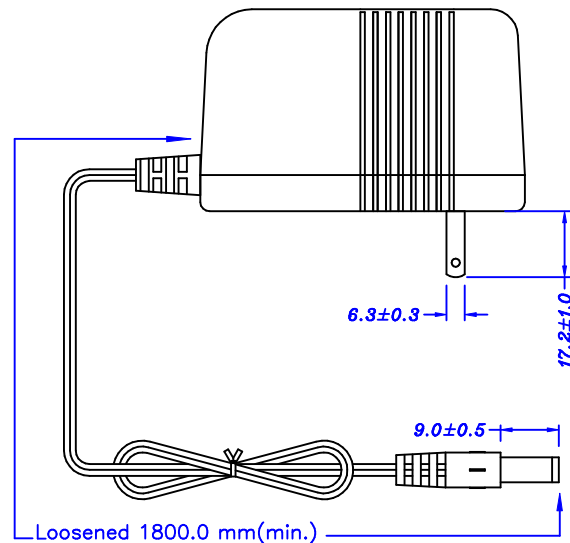
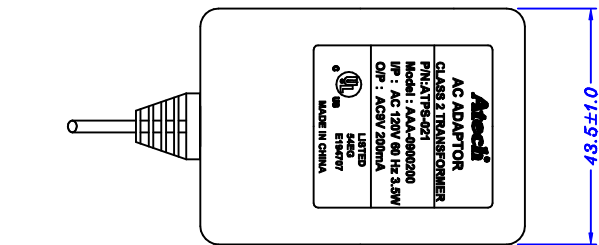


ELECTRIAL CHARACTERISTICS :

1. Primary rated voltage and frequency : 120 V 60 Hz.
2. Secondary rated voltage regulation:

I/P	Rated Voltage	Rate current	No Load Voltage
AC 120V/60Hz	AC 9.0V $\pm$ 5%	AC 200mA	AC 10.0V $\pm$ 5%

3. Exciting Current : input primary : 120V 60Hz 75mA Max.
4. Hi-pot test : Input 60Hz 1000V for one minute between primary and Secondary and between primary to Core. 500V for one minute between Secondary to core.
5. Insulation test : 500 V dc 100M ohm Min. windings and core.
6. Humidity test : Temp 32 $\pm$ 2°C relative humidity 90% RH for 6 hours, after Keeping 30 minute following insulation must be larger than 5M Ω .

						Atech®		TITLE
						Atech Technology Co., Ltd.		AC ADAPTOR
						TEL:(02)2794-8887 FAX:(02)2794-8884		DWG. NO.
								ATPS-021
RELEASE		11/19/2004	BART	AL	SUEDY	UNITS:	SAFETY	SHEET 10F 1
NO: DESCRIPTION		DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	11/19/04	DRAW Pair