
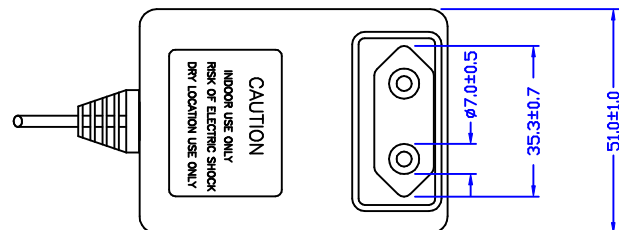


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 230V 50HZ.
2. SECONDARY RATED VOLTAGE REGULATION :

I/P	RATED VOLTAGE	RATE CURRENT	NO LOAD VOLTAGE
AC 230V/50Hz	AC 12.0V±5%	AC 800mA	AC 15.6V±5%

3. EXCITING CURRENT : INPUT PRIMARY : 230V 50HZ 80 mA MAX.
4. HI-POT TEST : INPUT 50HZ 3750V FOR ONE MINUTE BETWEEN PRIMARY AND SECONDARY AND BETWEEN PRIMARY TO CORE. 500V FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500V DC 100M OHM MIN. WINDINGS AND CORE.
6. HUMIDITY TEST : TEMP 32±2°C RELATIVE HUMIDITY 90% RH FOR 6 HOURS , AFTER KEEPING 30 MINUTE FOLLOWING INSULATION MUST BE LARGER THAN 5M OHM.
7. TEMPERATURE TEST ; LESS THAN 95 °C FOR RATED TEST WITH RESISTANCE METHOD.

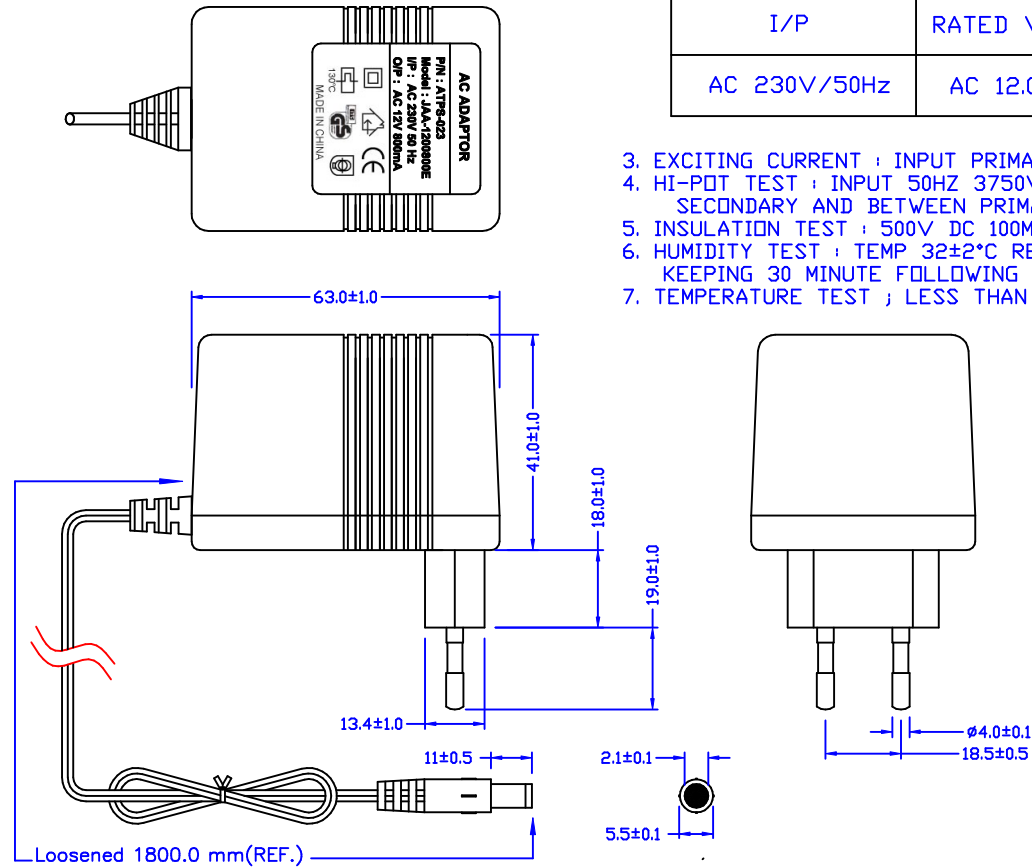

						Atech®		TITLE AC ADAPTOR	
						Atech Technology Co., Ltd.		DWG. NO. ATPS-023	
						UNITS: M/M		SAFETY	
						DATE 11/12/04		SHEET 1 OF 1	
REVISIONS								DRAW Pair	
A	LABEL ADD P/NA TPS-023	11/18/2004	BART	AL	SUEDY				
	RELEASE	11/12/2004	BART	AL	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD				