
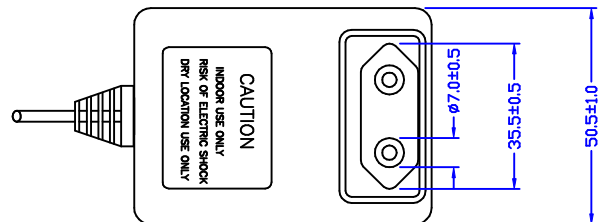


ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 230V 50HZ.
2. SECONDARY RATED VOLTAGE REGULATION :

I/P	RATED VOLTAGE	RATE CURRENT	NO LOAD VOLTAGE
AC 230V/50Hz	AC 12.0V $\pm$ 5%	AC 600mA	AC 14.4V $\pm$ 5%

3. EXCITING CURRENT : INPUT PRIMARY : 230V 50HZ 80 mA MAX.
4. HI-POT TEST : INPUT 60HZ 3750V FOR ONE MINUTE BETWEEN PRIMARY AND SECONDARY AND BETWEEN PRIMARY TO CORE. 500V FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500V DC 100M OHM MIN. WINDINGS AND CORE.
6. HUMIDITY TEST : TEMP 32 $\pm$ 2°C RELATIVE HUMIDITY 90% RH FOR 6 HOURS , AFTER KEEPING 30 MINUTE FOLLOWING INSULATION MUST BE LARGER THAN 5M OHM.
7. TEMPERATURE TEST , LESS THAN 75 °C FOR RATED TEST WITH RESISTANCE METHOD.

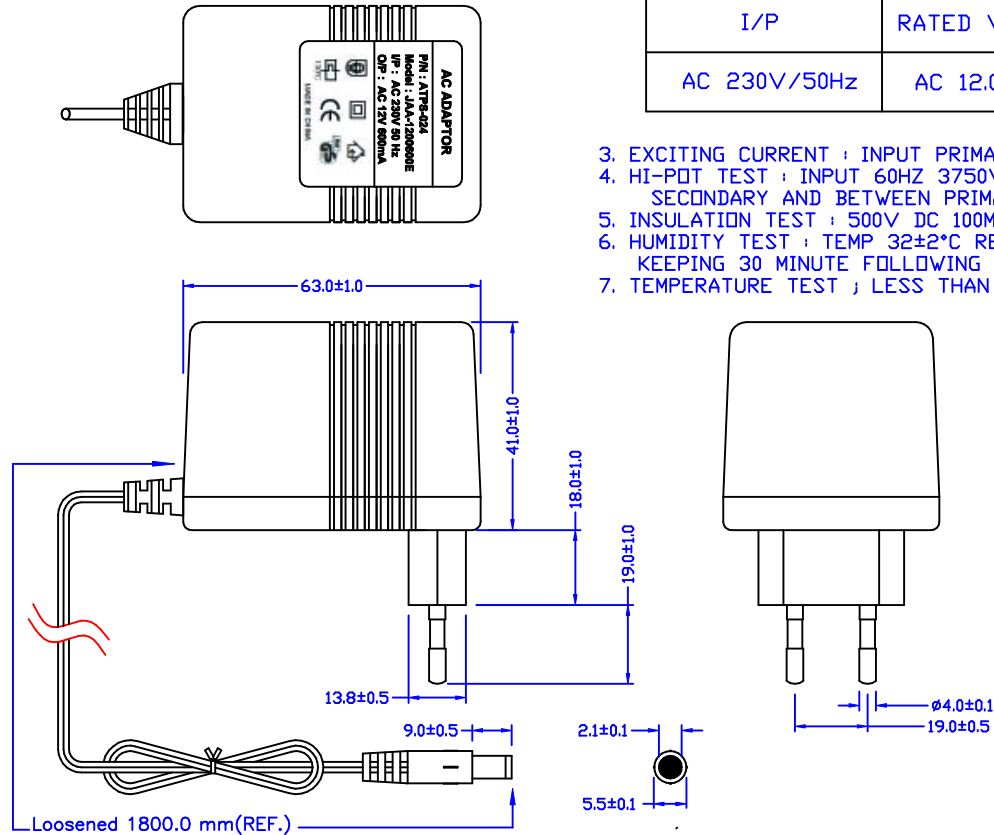

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004		TITLE	
								AC ADAPTOR	
								DWG. NO.	
								ATPS-024	
	RELEASE	12/01/2004	BART	AL	SUEYD	UNITS:		SAFETY	
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						12/01/04		DRAW <i>Pair</i>	