
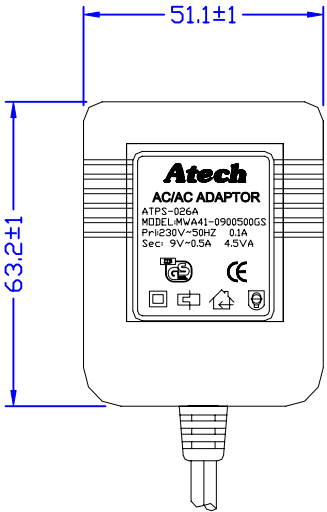
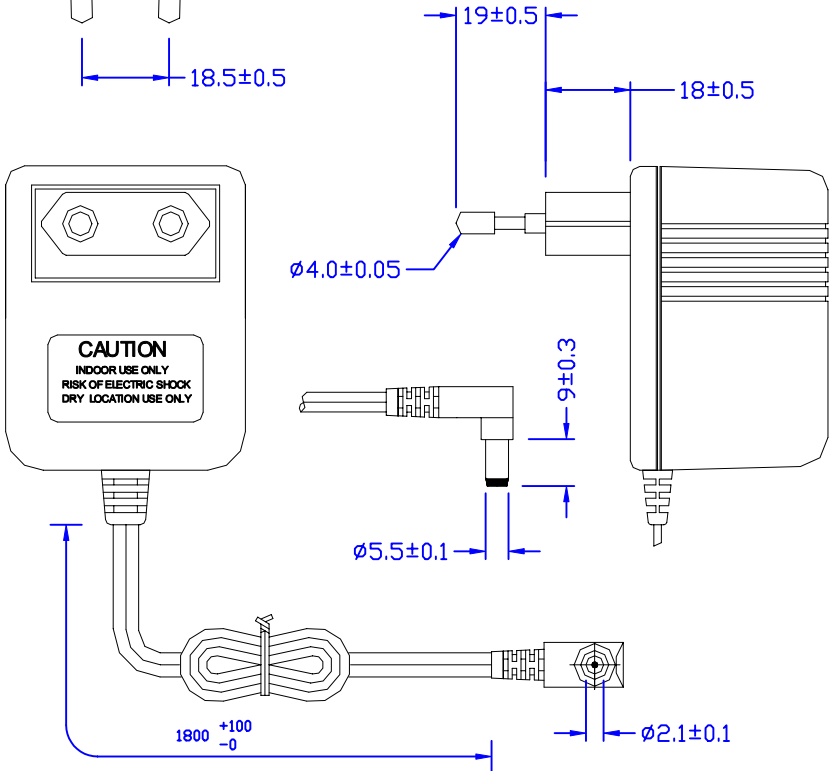


ELECTRICAL CHARACTERISTICS :

- 1. Input Rated Voltage and Frequency : 230 VAC 50 Hz.
- 2. Output Voltage and Current :

Input Volt.	Output Volt.	Rate Current	No Load Volt
230VAC/50Hz	AC9.0v±5%	AC 0.5A	AC10.6±5%

- 3. Exciting Current : I(o):50mA (rms) max.at Nom. Voltage input 230V 50Hz.
- 4. Efficiency : Efficiency 53% min. at input 230 V 50 Hz, Maximum load.
PS : Efficiency = (Wout/Win)*100%
- 5. Hi-Pot Test : 3750 Vac, one second, 5 mA, between input to output plug and core.
- 6. Insulation Test : DC 500 V 100 MΩ min, between input to output plug and core.

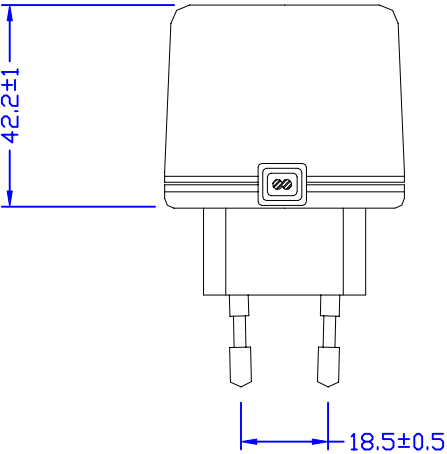

						Atech® Atech Technology Co., Ltd. TEL:02/2794-6667 FAX:02/2794-8004		TITLE AC ADAPTOR DWG. NO. ATPS-026A	
	RELEASE	03/21/2005	BART	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/21/05			
REVISIONS								DRAW <i>Pair</i>	