
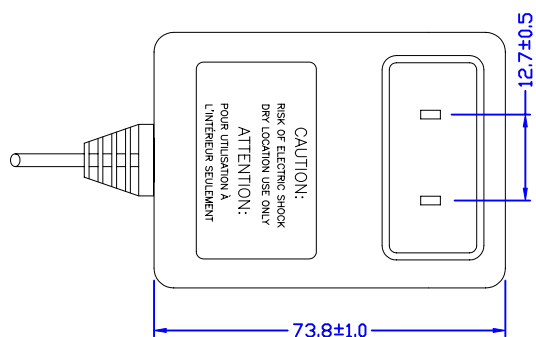
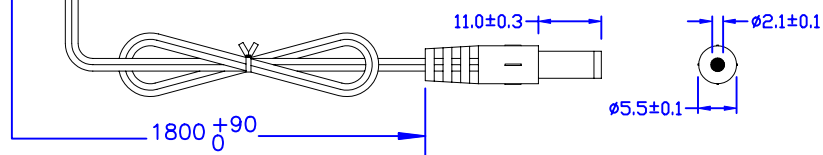

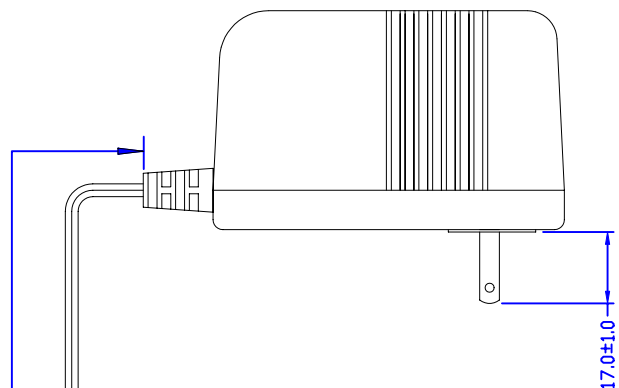


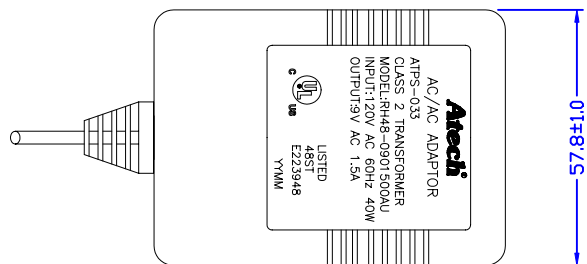

ELECTRIAL CHARACTERISTICS :

1. Input Rated Voltage and Frequency : 120 VAC 60 Hz.
2. Output Voltage and Current :

Input Volt.	Output Volt.	Rate Current	No Load Volt
120VAC/60HZ	AC9.0V±5%	AC1.5A	AC10.8V±5%

3. Exciting Current :I(o): 45mA (rms) max, at Nom. Voltage input 120 V 60 Hz.
4. Efficiency : Efficiency 68% min, at input 120 V 60Hz, Maximum load.
PS: Efficiency = (Wout/Win)*100%
4. Hi-pot test :
1800 Vac, one second, 5 mA, between input to output plug and core.
5. Insulation test :
DC 500 V 100MΩ min. between input to output plug and core.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE AC ADAPTOR	
							DWG. NO. ATPS-033	
	RELEASE	03/17/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/17/05		DRAW <i>Pair</i>
REVISIONS								