

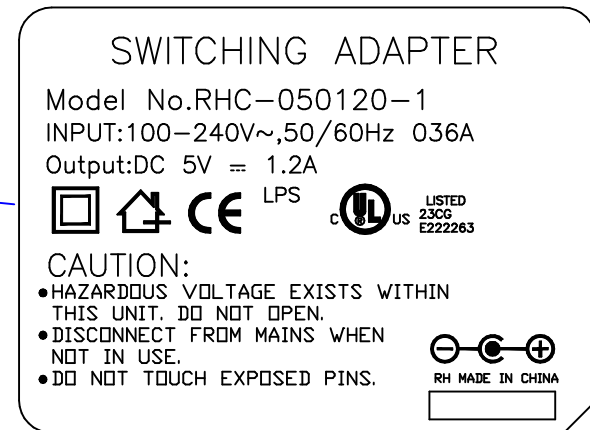


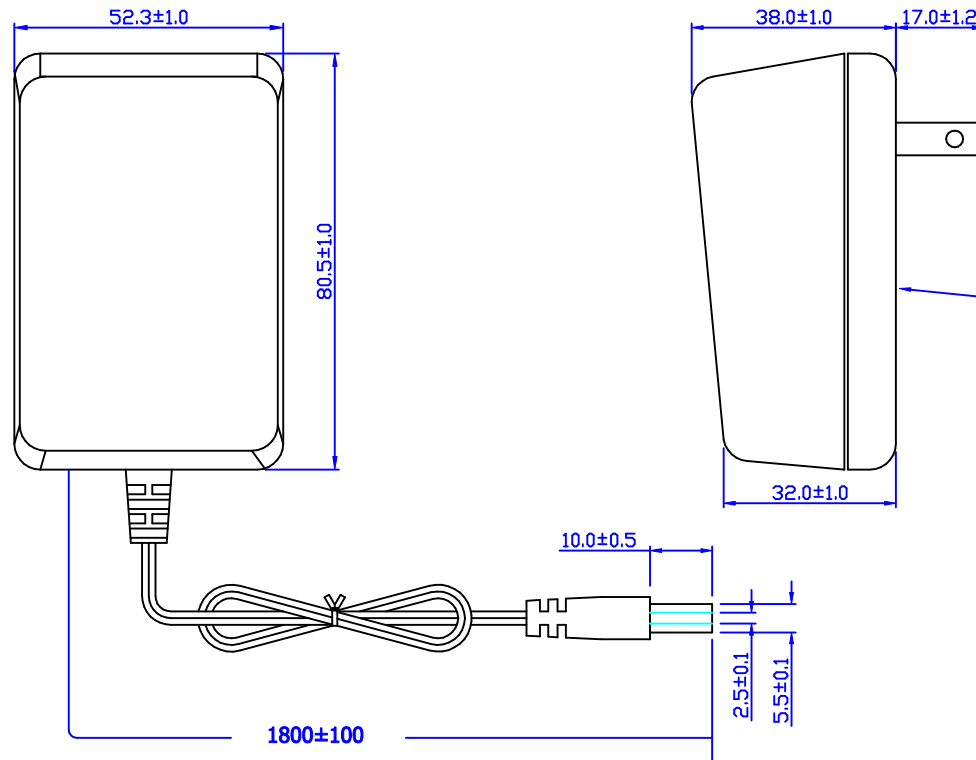

#### ELECTRICAL CHARACTERISTICS:

1. INPUT AC 90-264V
2. FREQUENCY 47Hz-63Hz
3. INRUSH CURRENT 50A MAX.
4. EFFECIENCY 55% typ.
5. LEAKGE CURRENT 0.25mA MAX.
6. RETED OUTPUT DC5V LOAD 1.2A
7. LOAD/LINE REGULATION 5V+/-5%
8. RIPPLE&NOISE VOLTAGE 100mVp-p
9. OUTPUT SHORT PROTECTION SHORT BE RE MOVE NO DAMAGE
10. OVER VOLTAGE PROTECTION ZENER SHORT PROTECTION
11. HOLD UP TIME 5ms typ.

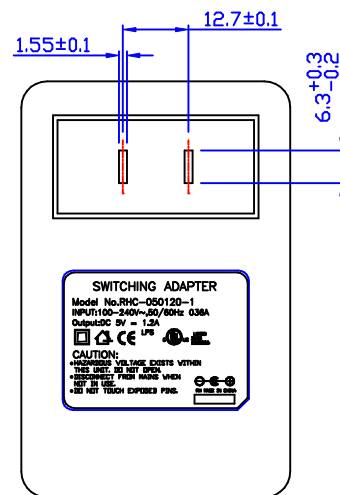

|           |             |            |      |        |       |                                   |  |                         |  |
|-----------|-------------|------------|------|--------|-------|-----------------------------------|--|-------------------------|--|
|           |             |            |      |        |       | <b>Atech®</b>                     |  | TITLE Switching Adapter |  |
|           |             |            |      |        |       | Atech Technology Co. Ltd.         |  | DWG. NO. ATPS-035       |  |
|           |             |            |      |        |       | TEL: 022794-6667 FAX: 022794-8004 |  |                         |  |
| RELEASE   |             | 09/08/2005 | PAIR | EUGENG | SUEDY | UNITS: M/M                        |  | SAFETY                  |  |
| NO.       | DESCRIPTION | DATE       | BY   | CHK    | APPD  | DATE                              |  | SHEET 1 OF 1            |  |
| REVISIONS |             |            |      |        |       | 09/08/05                          |  | DRAW Pair               |  |