
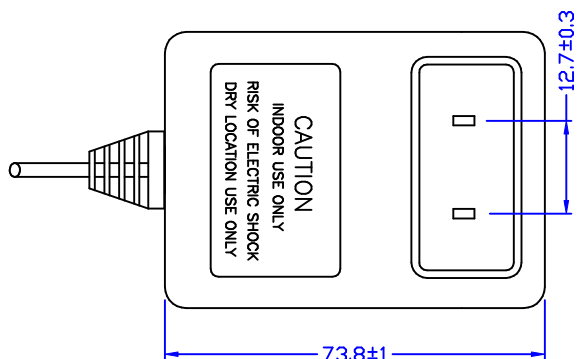


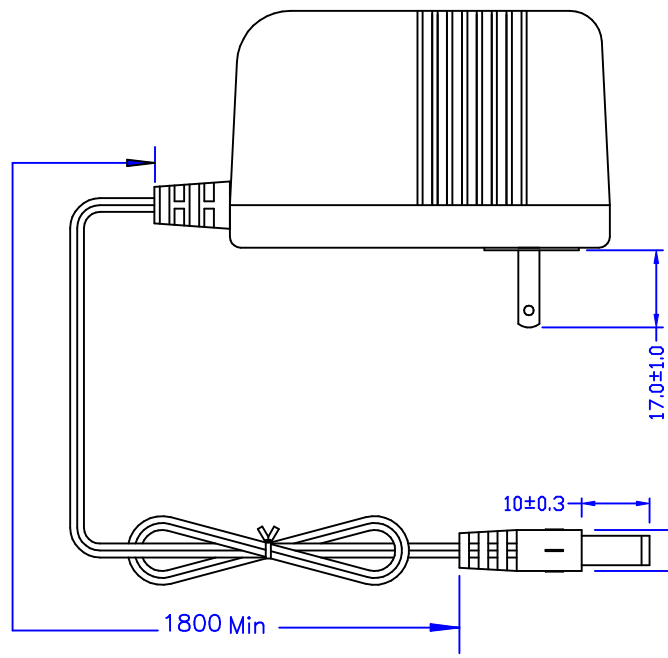


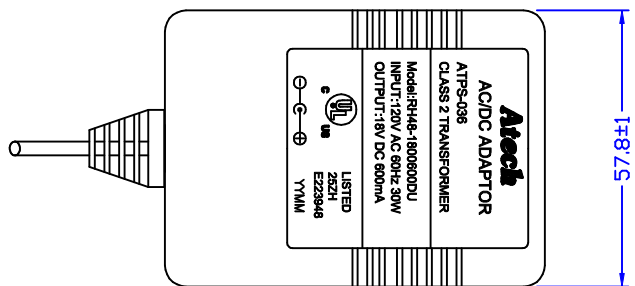

ELECTRIAL CHARACTERISTICS :

1. Primary rated voltage and frequency : 120V 60Hz
2. Secondary rated voltage regulation :

I/P	Rated Voltage	Rate Current	No Load Voltage
120VAC/60HZ	DC18.0V $\pm$ 5%	DC600mA	AC22.2V $\pm$ 5%

3. Exciting Current : Input Primary : 120V 60Hz 60mA Max.
4. Hi-Pot test : 1800 Vac , one second, 5mA, between input to output plug and core.
5. Insulation test : 500V dc 100M ohm Min. between input to output plug and core.
6. Humidity test : Temp 32 $\pm$ 2 $^{\circ}$ C relative humidity 90% RH for 6 hours, after keeping 30 minute following insulation must be larger than 5M ohm.
7. Temperature test : Less than 95 $^{\circ}$ C for rated test with Resistance methos.

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	
								AC ADAPTOR	
A	18VDC	10/24/2005	BART	AL	SUEDY			DWG. NO.	
	RELEASE	09/05/2005	BART	AL	SUEDY	UNITS:		ATPS-036	
						M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						09/05/05		DRAW Pair	