
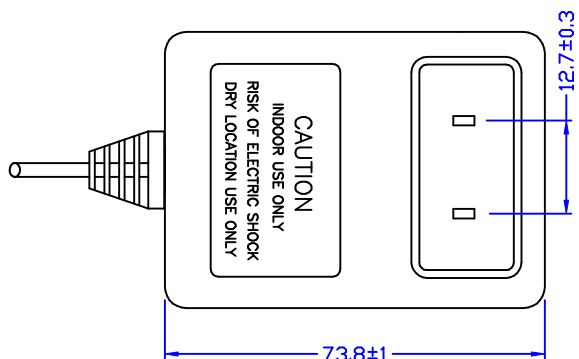
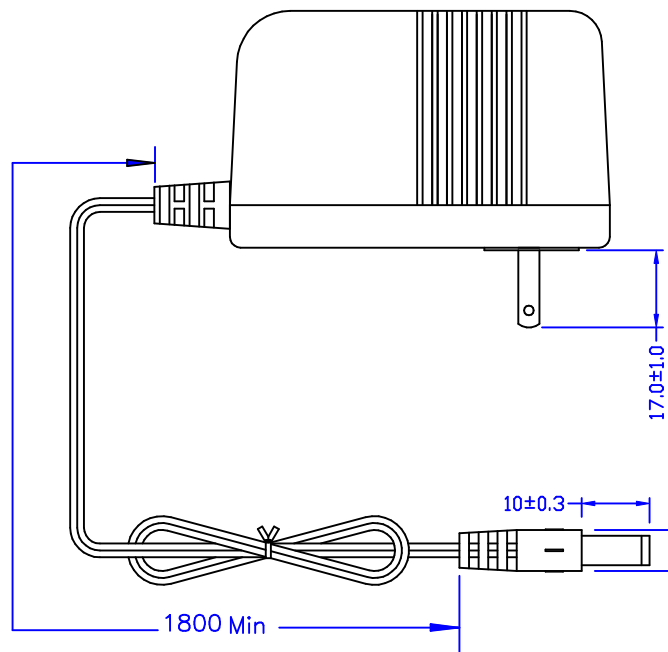
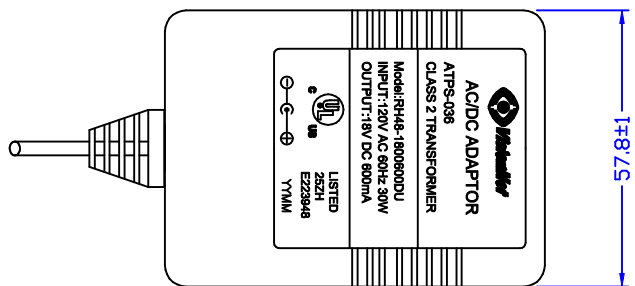


ELECTRIAL CHARACTERISTICS :

1. Primary rated voltage and frequency : 120V 60Hz
2. Secondary rated voltage regulation :

I/P	Rated Voltage	Rate Current	No Load Voltage
120VAC/60HZ	DC18.0V±5%	DC600mA	AC22.2V±5%

3. Exciting Current : Input Primary : 120V 60Hz 60mA Max.
4. Hi-Pot test : 1800 Vac , one second, 5mA, between input to output plug and core.
5. Insulation test : 500V dc 100M ohm Min. between input to output plug and core.
6. Humidity test : Temp 32±2°C relative humidity 90% RH for 6 hours, after keeping 30 minute following insulation must be larger than 5M ohm.
7. Temperature test : Less than 95 °c for rated test with Resistance methos.
8. Surge protector

						Atech®		TITLE AC ADAPTOR	
						Atech Technology Co., Ltd.		DWG. NO. ATPS-036V	
						TEL: (02) 2794-6667 FAX: (02) 2794-8004			
RELEASE		03/30/2006	PAIR	AL	EUGENE	UNITS: M/M		SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	DATE 03/30/06		SHEET 1 OF 1	
REVISIONS								DRAW Pair	