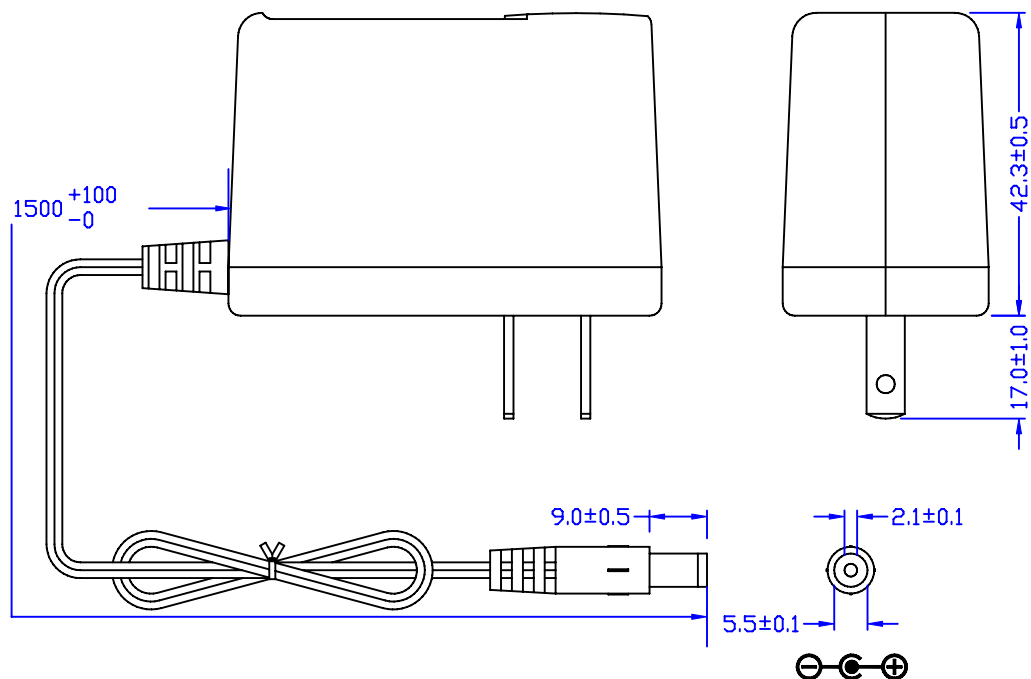
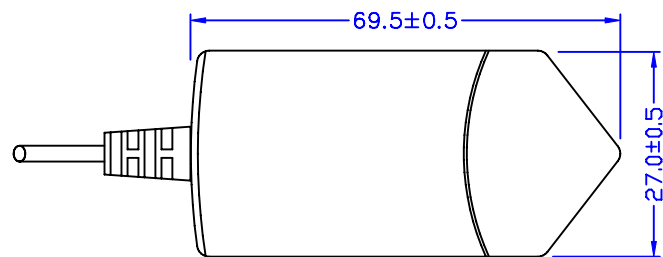


ELECTRICAL CHARACTERISTICS:

1. INPUT : AC90-264V
2. FREQUENCY : 47HZ-63HZ
3. INRUSH CURRENT : 50A MAX.
4. EFFECIENCY : 65% TYP.
5. LEAKAGE CURRENT : 0.25mA MAX.
6. RETED OUTPUT : DC5.0V
7. RATED LOAD : 1.2A
8. LOAD/LINE REGULATION : 5.0V±5%
9. RIPPLE&NOISE VOLTAGE : 100mVp-p
10. OUTPUT SHORT PROTECTION : SHORT BE REMOVE NO DAMAGE
11. OVER VOLTAGE PROTECTION : ZENER SHORT PROTECTION
12. HOLD UP TIME : 5mS TYP.
13. STAND BY POWER 0.75W TYP.
14. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE Switching Power Supply	
								DWG. NO. ATPS-039R-1	
	RELEASE	11/27/2007	PAIR	Willie	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						11/27/07		DRAW Pair	