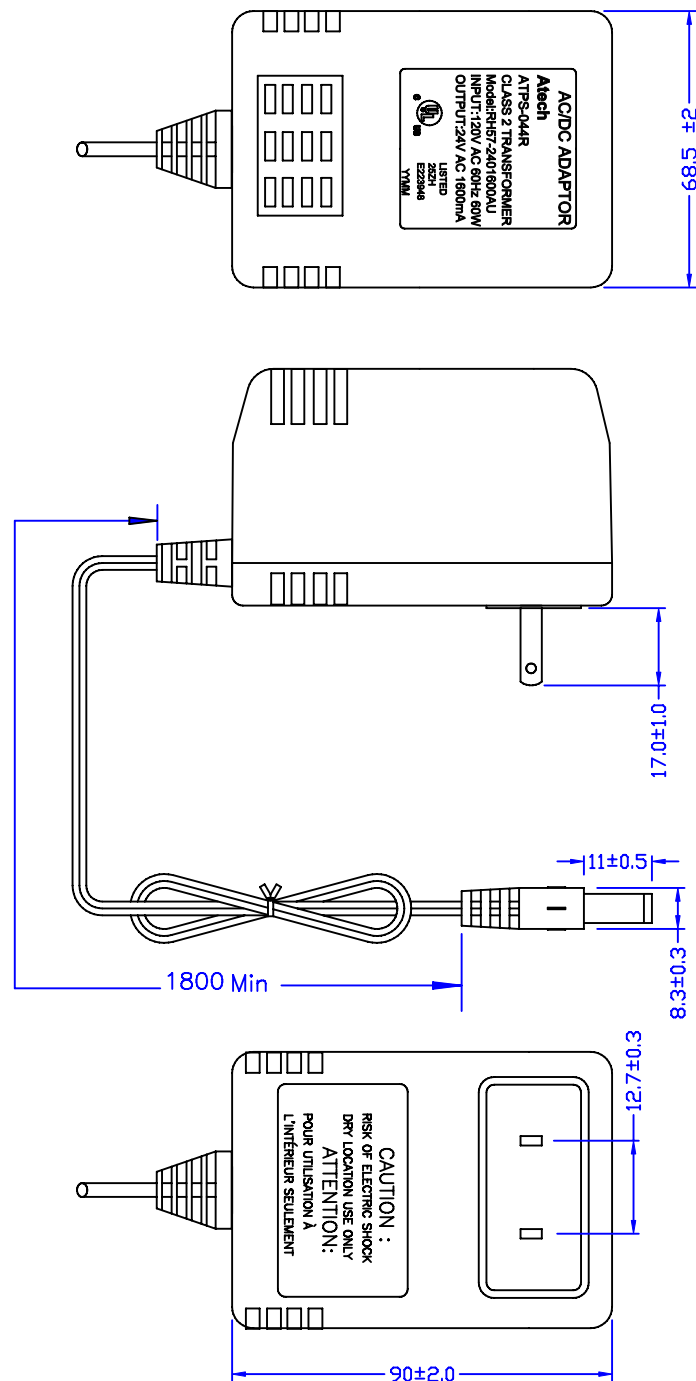


ELECTRIAL CHARACTERISTICS :

1. Primary rated voltage and frequency : 120V 60Hz
2. Secondary rated voltage regulation :

I/P	Rated Voltage	Rate Current	
120VAC/60HZ	AC 24VAC±5%	AC16000mA	

3. Exciting Current : Input Primary : 120V 60Hz 90mA Max.
4. Hi-Pot test : 1240 Vac , one minutes, between input to output plug and core.
5. Insulation test : 500V dc 100M ohm Min. between input to output plug and case.
6. Humidity test :
Temp 40±2°c relative humidity 90%-95% RH for 4 hours,
after at minutes taken out from oven.
and wiped. test 3.4 ,3.7 and insulation test 10M ohm min.
7. Temperature test : Less than 95 °c for rated test with Resistance methos.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE AC ADAPTOR	
							DWG. NO. ATPS-044R	
	RELEASE	12/26/2006	PAIR	AL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						12/26/06		